

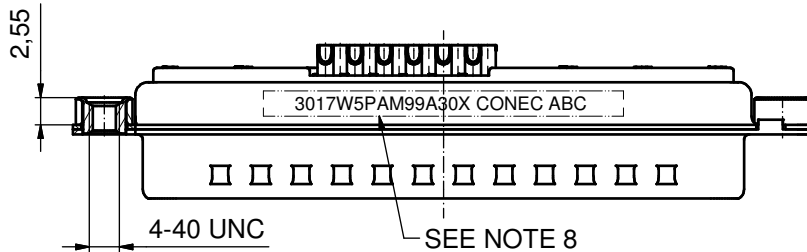
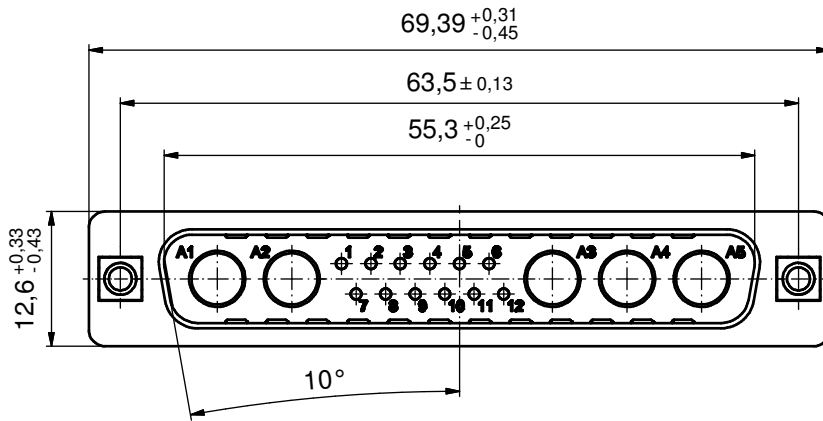
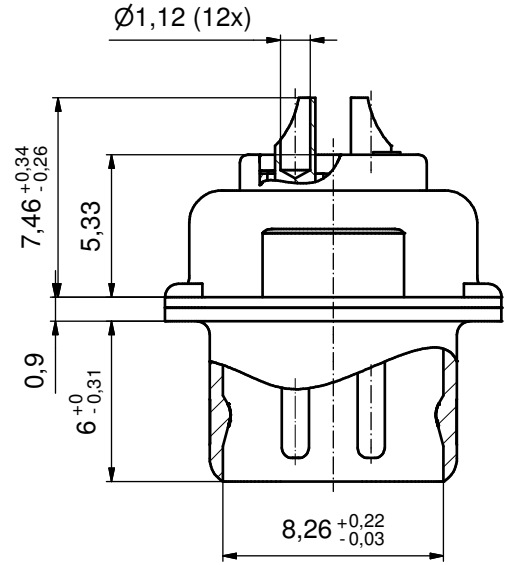


(5:1)

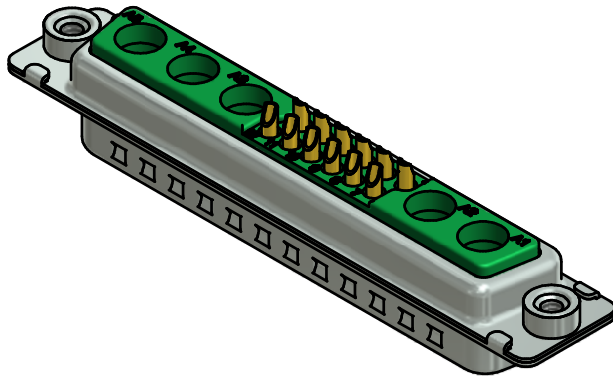

NOTES:

1. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1 - A5
5. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
7. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
8. CONNECTOR IS PART MARKED: 3017W5PAM99A30X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
rev.	description	date	name	date	name		
a	Original			drawn	09.02.15	Henneboel	
				appd.	09.02.15	Lehmenkühler	
				norm			
				d-old			

CONEC

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB COMBINATION MALE 17W5P SOLDER CUP with threaded insert	
dwg no: 13K1A4891	DIN-A3 sh: 1
part no: 3017W5PAM99A30X	