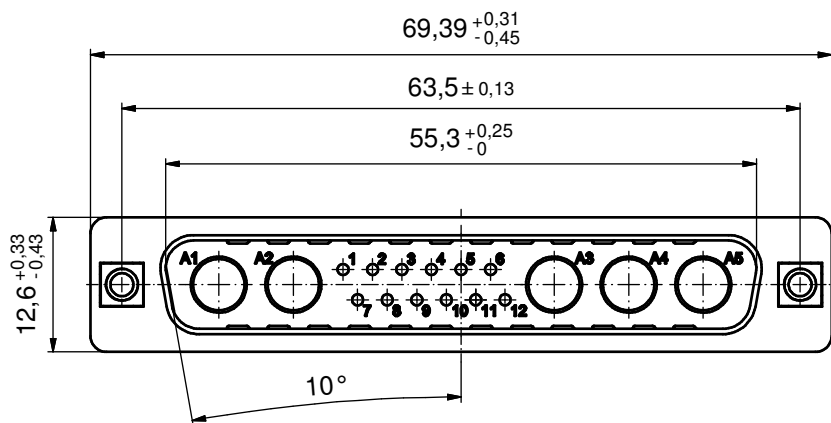
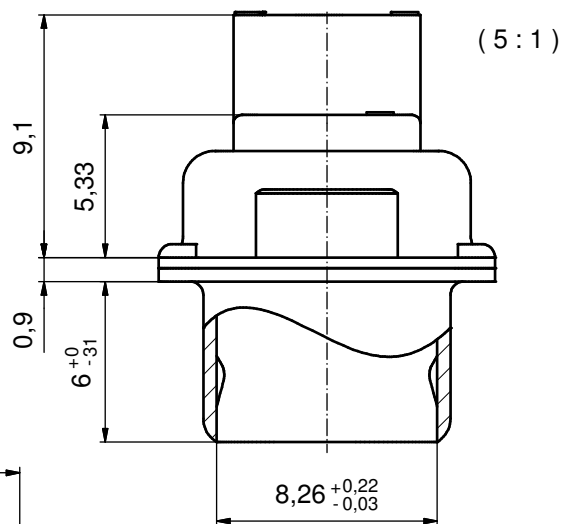
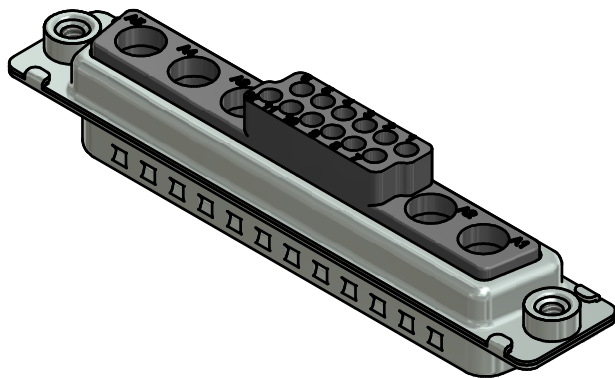


NOTES:

1. METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR WILL BE SUPPLIED WITHOUT CONTACTS
4. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
5. COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3017W5P XK99A30X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance			scale: 2:1 (5:1)					
							material: SEE NOTES					
								date	name	title: D-SUB COMBINATION MALE 17W5P CRIMP STYLE with threaded insert		
								drawn	16.12.13			Henneboel
								appd.				
								norm				
								d-old				
a	Original						dwg no:		DIN-A3			
rev.	description	date	name				13K1A4541		sh: 1			
						part no: 3017W5PXX99A30X						

Directive 2002/95/EC RoHS compliant