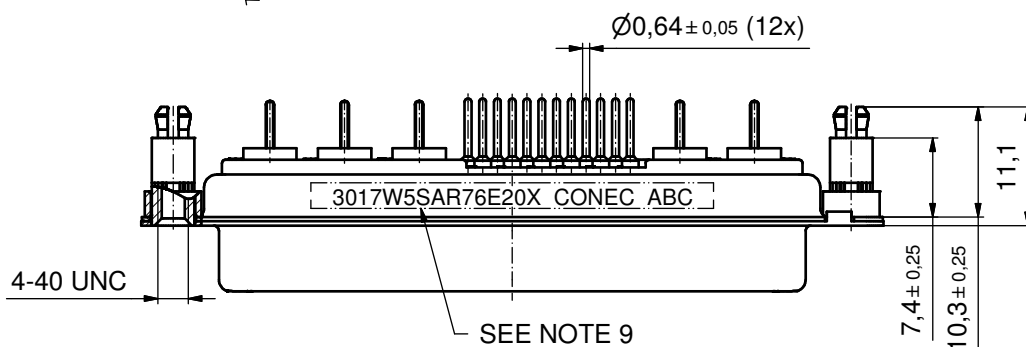
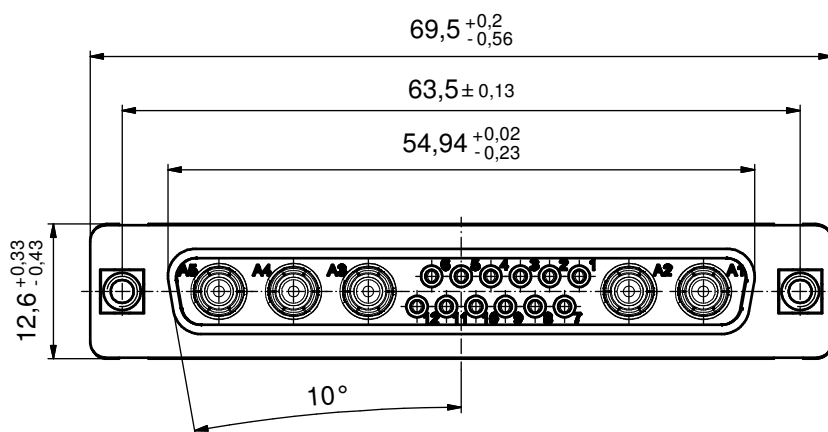
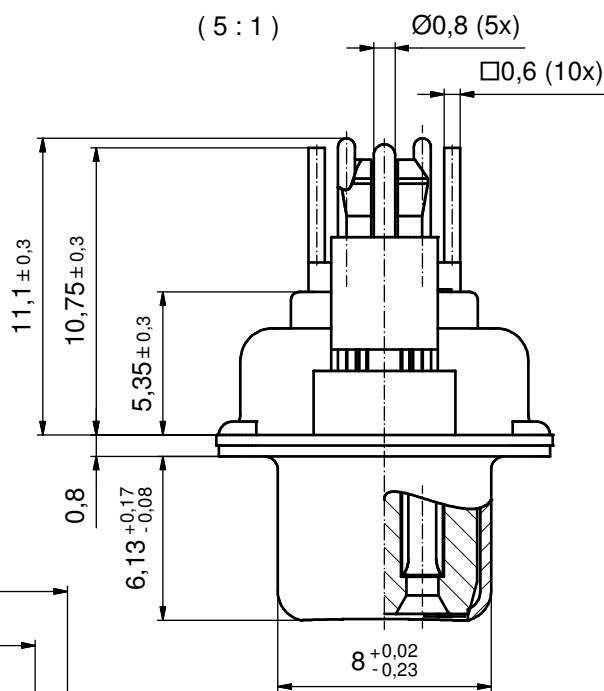
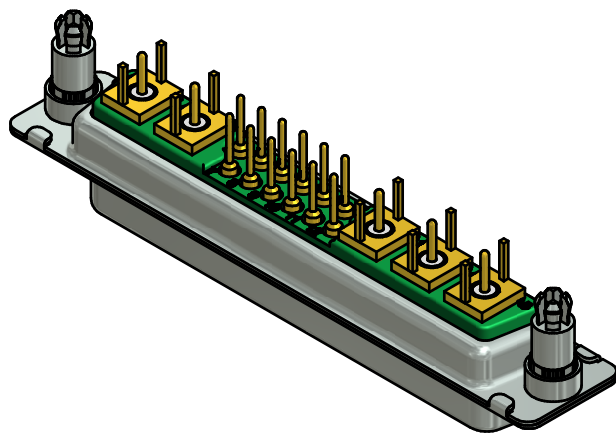


NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING, INNER CONDUCTOR: 50µm HARD GOLD over min. 50µm NICKEL
PLATING, OUTER CONDUCTOR: MATING AREA: 30µm HARD GOLD over min. 50µm NICKEL
TERMINATION SIDE: GOLD FLASH over NICKEL
- THREADED SPACER CLIPS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
PCB-HOLE: Ø3,1±0,1mm; PCB THICKNESS: 1,6mm
- COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3017W5SAR76E20X CONEC. ABC

Directive 2002/95/EC RoHS compliant


THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
				date	name		
				drawn	09.12.13	Henneboel	
				appd.	10.12.13	Schmidt	
				norm			
				d-old			
a	Original						
rev.	description	date	name				

scale:		2:1 (5:1)	
material:		see notes	
title:			
D-SUB COMBINATION FEMALE			
17W5S			
with threaded spacer clip			
dwg no:			DIN-
13K1A4537			A3
			sh: 1
part no:		3017W5SAR76E20X	

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

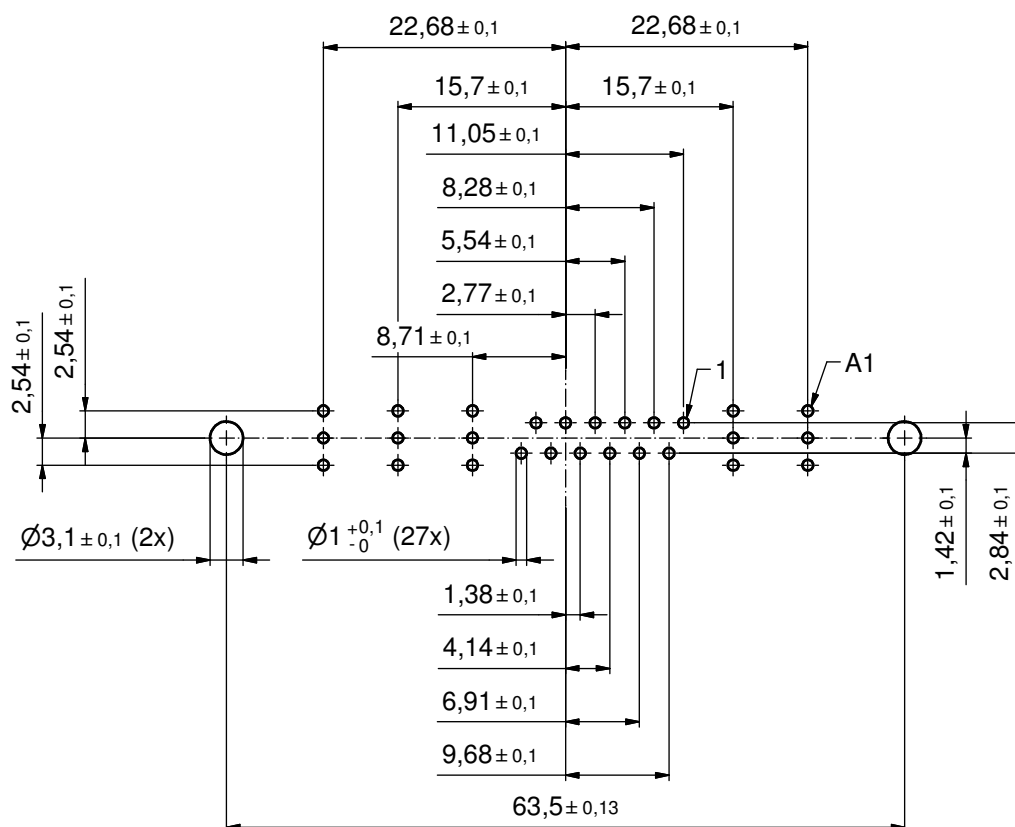

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			scale: 2:1				
							material: see sheet 1				
								date	name	title: P.C.B. HOLE DRILLINGS D-SUB COMBINATION FEMALE 17W5S with threaded spacer clip	
								drawn 09.12.13	Henneboel		
								appd. 10.12.13	Schmidt		
				norm		dwg no: 13K1A4537					
				d-old							
											
a	Original					DIN-A3 sh: 2					
rev.	description	date	name			part no: see sheet 1					