
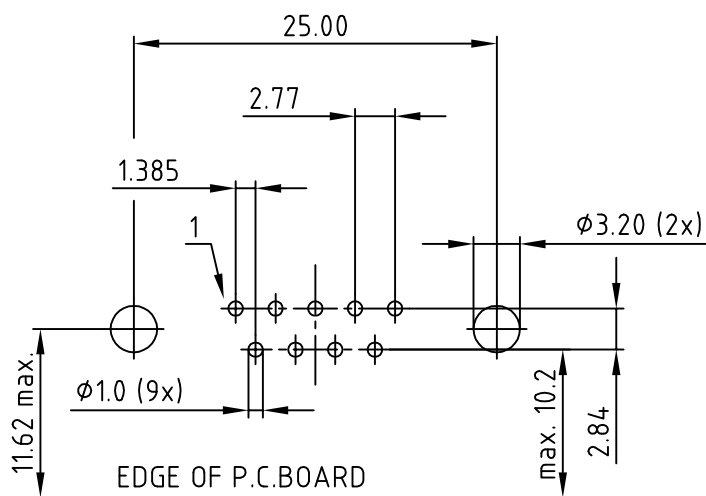
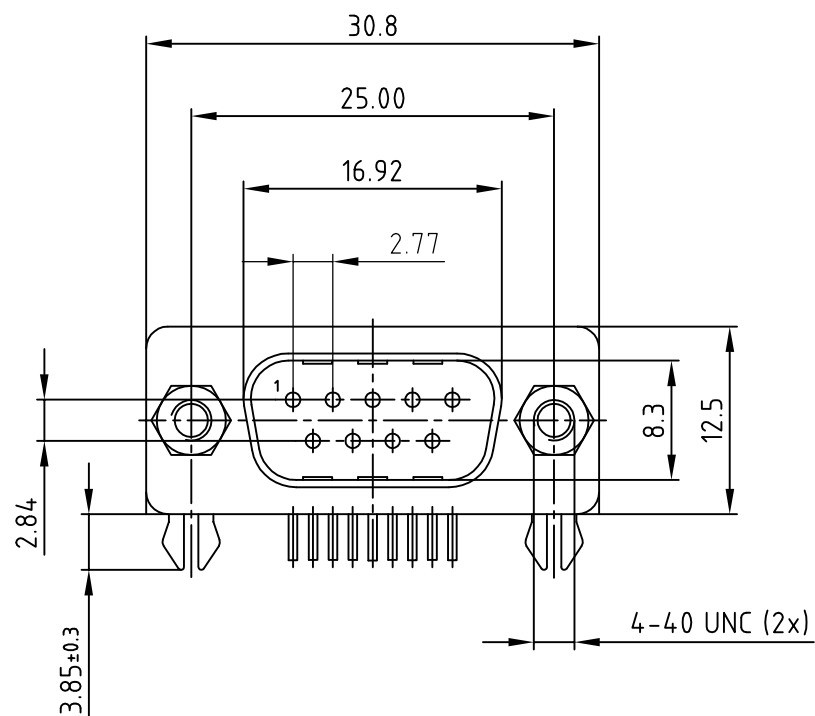
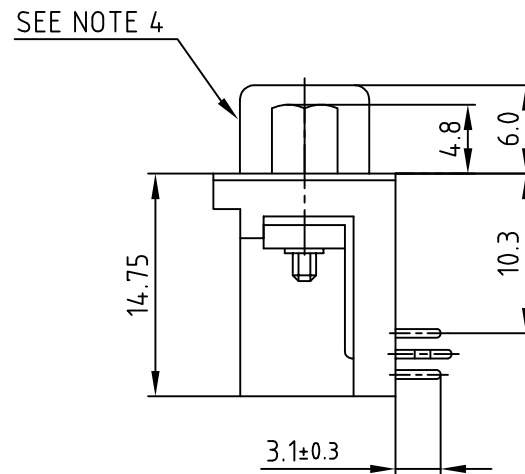


used for: D-SUB

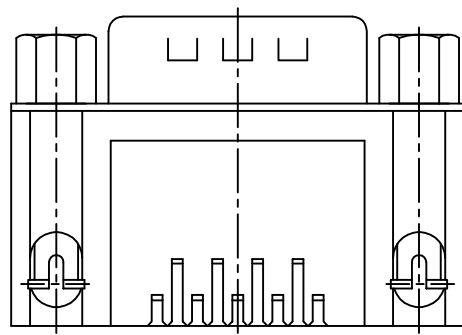


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

Directive 2002/95/EC RoHS compliant

SPECIFICATION

1. MATERIAL:
 - INSULATOR: THERMAL PLASTIC UL 94 V-0
 - CONTACTS: COPPER ALLOY
 - SHELL: STEEL
 - RIVET, BOARDLOCK: COPPER ALLOY
2. CONTACT PLATING:
 - UNDERPLATE: 40µin NICKEL
 - CONTACT AREA: GOLD FLASH
 - SOLDER TAILS AREA: GOLD FLASH
3. ELECTRICAL:
 - OPERATION VOLTAGE: 250 V AC max.
 - CURRENT RATING: 3 A max.
 - CONTACT RESISTANCE: 15 mOhm max.
 - INSULATION RESISTANCE: 3000 MOhm min @ 500 V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC / minute
 - OPERATING TEMPERATURE: -55°C TO +105°C
4. CONNECTOR IS PART MARKED: 301A10679X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

				tolerance 0. ±0.5 .0 ±0.3 .00 ±0.2		 dim. in mm	
				2011	date	name	
				drawn	18.05.	Lehmenkühler	
				appd.	18.05.	Fischer	
				norm			
				d-old			
							
a	Original						
rev.	description	date	name				

scale:	2:1
material:	SEE SPECIFICATION

title:	D-SUB R/A 9.4mm MALE 90° 9pos. with snap-in + clinch nut + screw lock
--------	---

dwg no:	16K1A2829	DIN-A
		4
		sh: 1/1
part no:	301A10679X	