
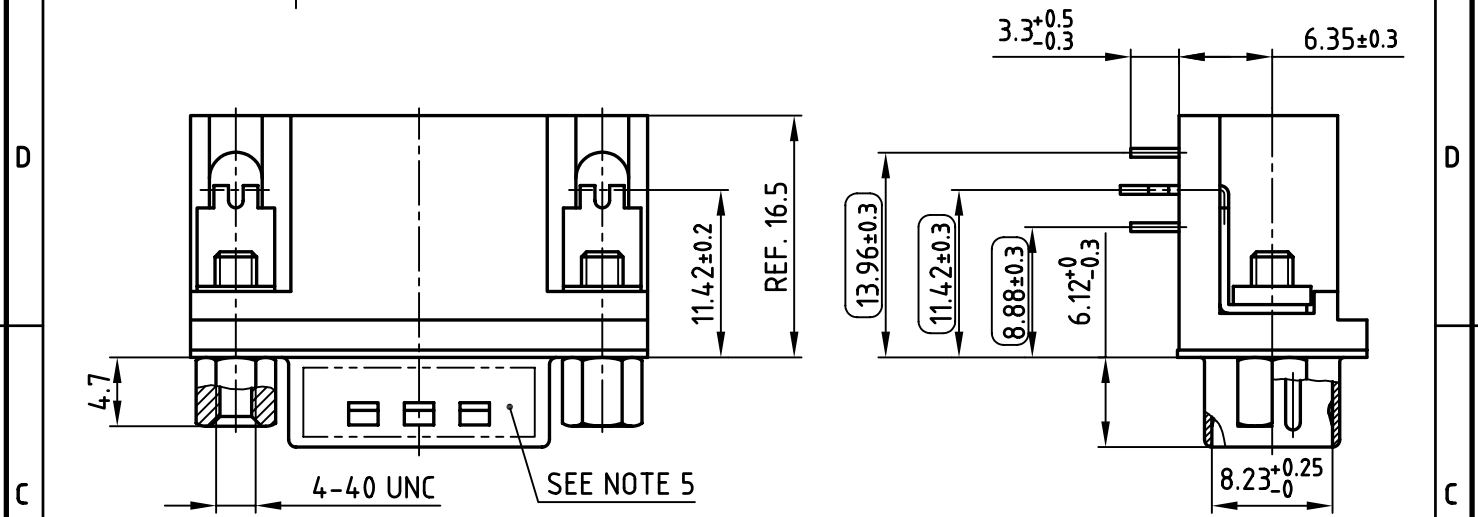


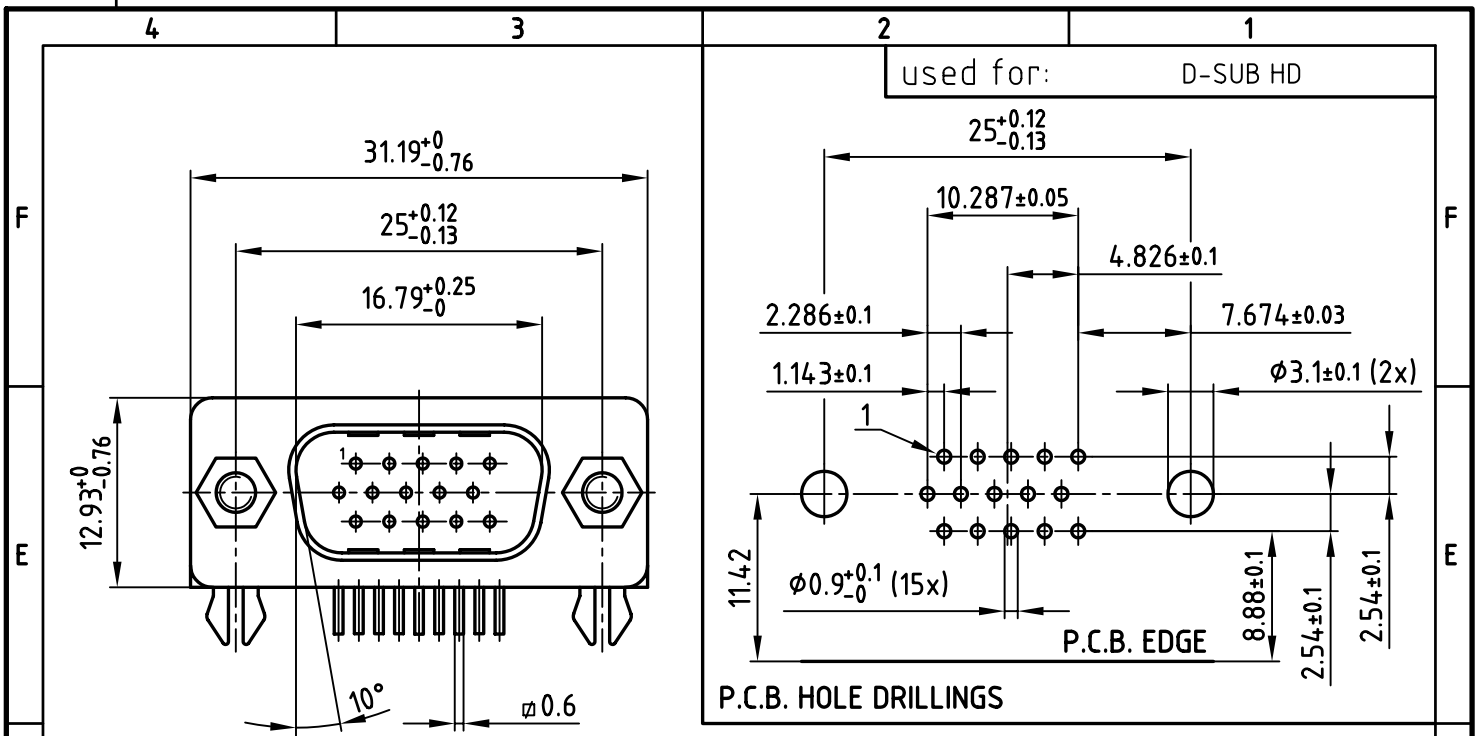

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. PCB-CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. CONNECTOR IS PART MARKED: 301A10869X CONEC ABC
6. = CHECK DIMENSION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance				scale: 2:1
					material: SEE NOTES
	2005 date name			D-SUB HD MALE 90° 15pos. pin angled 0.350", stamped contacts with threaded lock and clip	
	drawn 20.12. Lehmenkühler				
	appd. 20.12. Mickenbecker				
norm DIN 41652					
d-old			dwg no: AutoCAD 2004 DIN-A		
			16K2A703		
			part no: 301A10869X		
rev.	description	date	name	sh: 1/1	