

4

3

2




1

used for:

D-SUB HD

(b)

POS.	A -0.76	B $+0.25$	C	D -0.3	PART-NO.
26	39.52	25.12	33.30 $+0.15$ -0.1	6.12	301A10879X
44	53.42	38.84	47.04 ± 0.13	5.99	301A10889X
62	69.70	55.30	63.50 ± 0.13	5.99	301A10899X

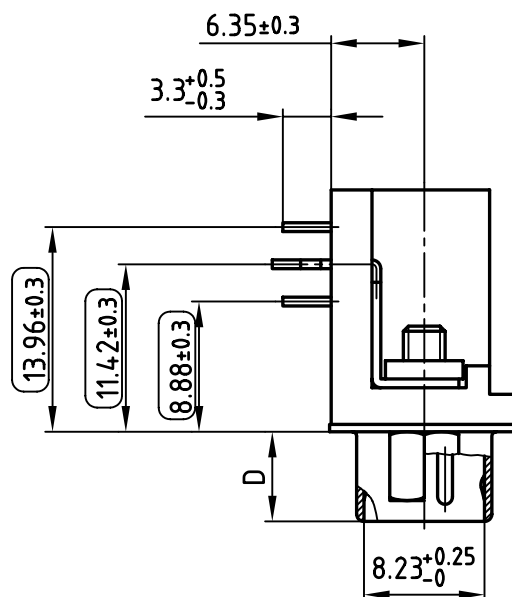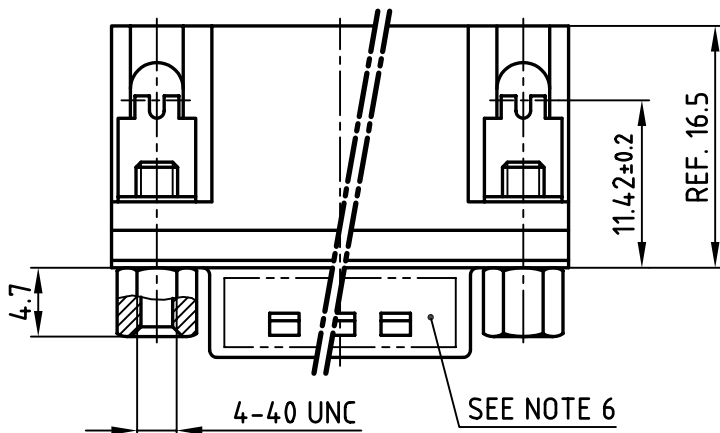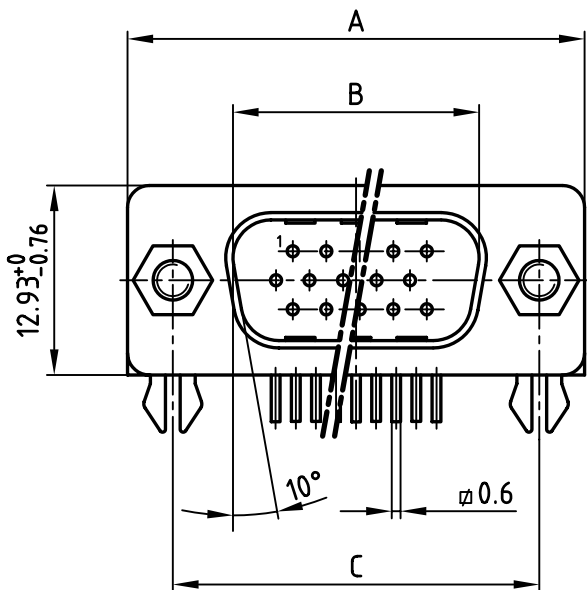

Directive 2002/95/EC
"RoHS"
Compliant

NOTES:

- METALSHELLS: STEEL; min. 320μ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
- PCB-CLIP: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH5B
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL

CUSTOMER APPROVAL DATE:

NAME:

TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL


THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä 24-16	20.12.2005	Lehmen
rev.	description	date	name

tolerance

2002	date	name
drawn	28.06.	Parei
appd.	28.06.	E. Mickenbecker
norm	DIN 41652	
d-old		



scale:

2:1

material:

SEE NOTES

title:

D-SUB HD MALE 90°

26-62pos. pin angled 0.350", stamped contacts with threaded lock and clip

dwg no:

AutoCAD 2000

DIN-A

16K1A703

4

sh: 1/1

part no:

SEE TABLE

4

3

2

1