

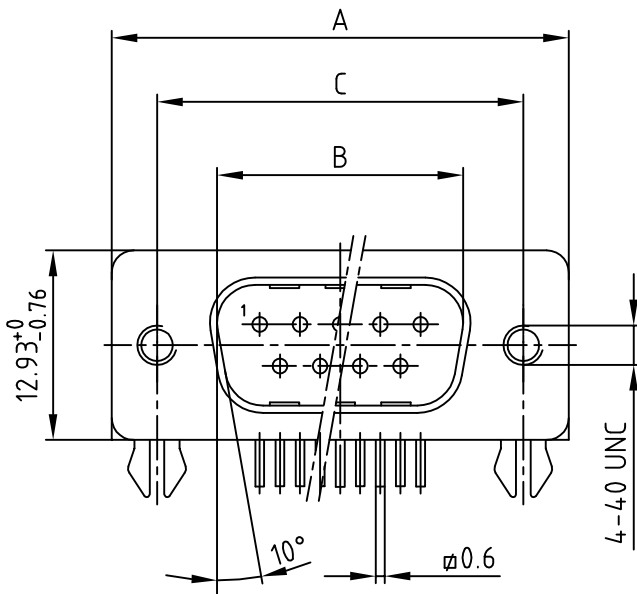


used for: D-SUB

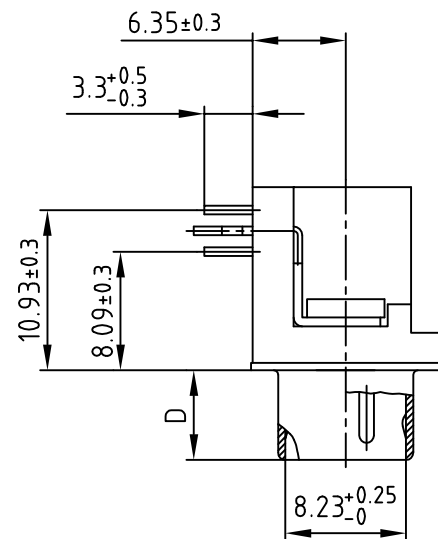

POS.	A -0.76	B +0.25	C	D -0.3	Part NO.
9	31.19	16.79	25.00 ± 0.12 -0.13	6.12	301A11029X
15	39.52	25.12	33.30 ± 0.15 -0.1	6.12	301A11039X
25	53.42	38.84	47.04 ± 0.13	5.99	301A11049X
37	69.70	55.30	63.50 ± 0.13	5.99	301A11059X

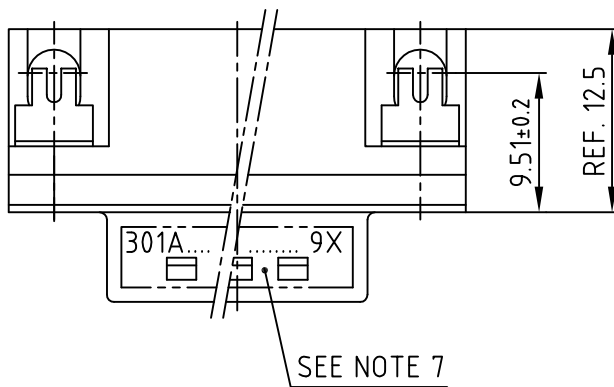

NOTES:

- ① 1. METALSHELLS: STEEL; NICKEL PLATED
2. INSULATORS: PA UL 94 V-0, BLACK
3. PLATING: GOLD FLASH over NICKEL
4. PCB-SNAP: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 301A110...9X CONEC ABC

RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä5865	28.10.2015	Unkriier
a	Original		
rev.	description	date	name

tolerance			dim. in mm
2002	date		
drawn	28.06.		name
appd.	28.06.		E. Mickenbecker
norm	DIN 41652		
d-old			

CONEC

scale:	2:1
material:	SEE NOTES
title:	D-SUB MALE 90° 9-37pos. pin angled 0.318inch, stamped contacts with threaded insert and clip
dwg no:	16K1A702
part no:	SEE TABLE
DIN-A	3
sh:	1/1