

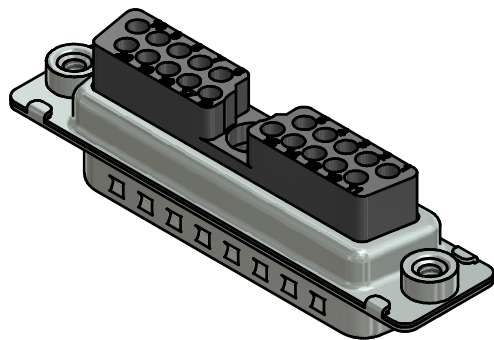
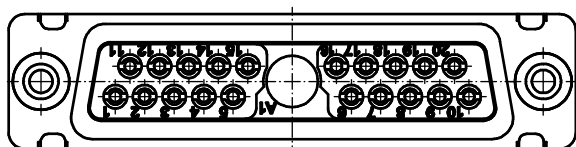

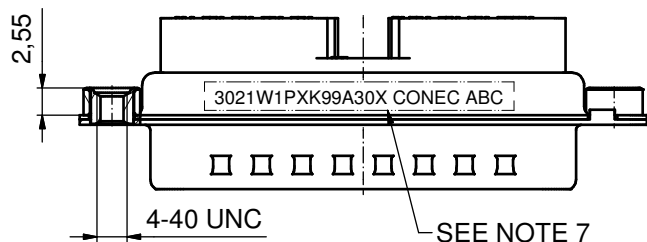


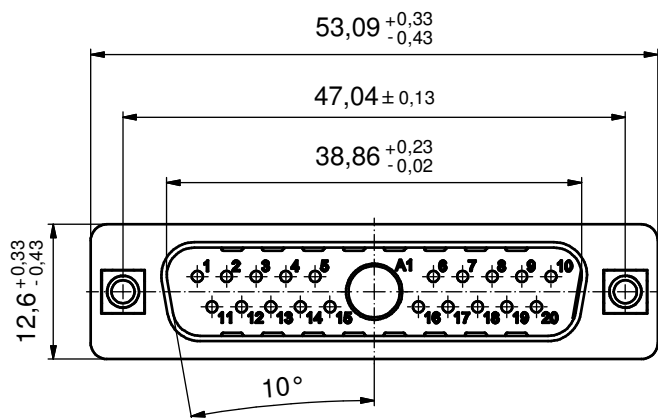

(5:1)

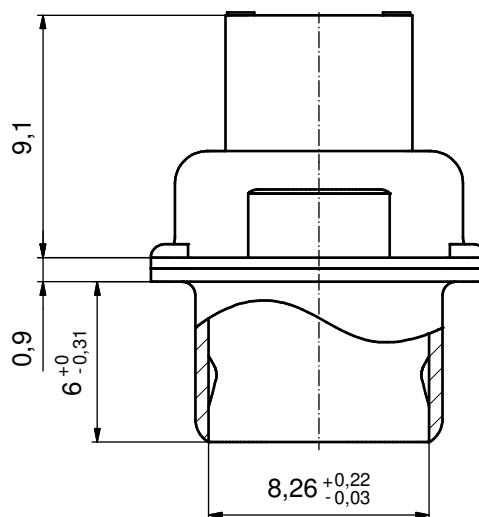

NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
4. COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
5. CONNECTOR WILL BE SUPPLIED WITHOUT CONTACTS
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3021W1P XK99A30X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)				
							material: SEE NOTES				
								date	name	title: D-SUB COMBINATION MALE 21W1P CRIMP STYLE with threaded insert	
								drawn	12.02.14 Henneboel		
								appd.	13.02.14 Lehmenkühler		
				norm							
				d-old		dwg no:		DIN-A3 sh: 1			
a	Original					13K1A4533					
rev.	description	date	name			part no: 3021W1PXX99A30X					