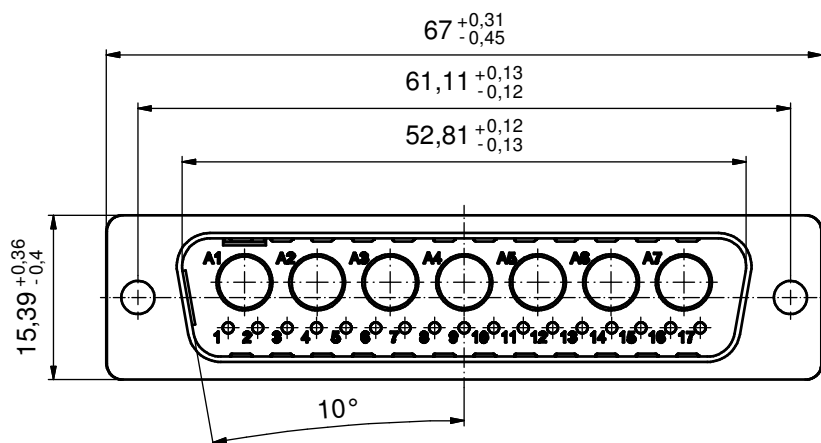
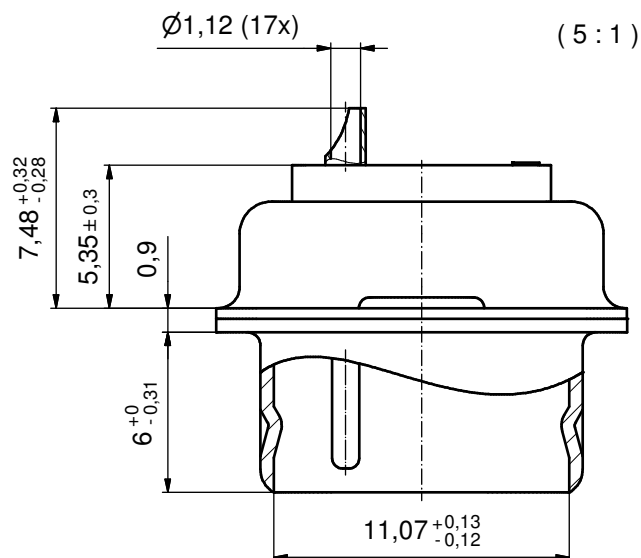
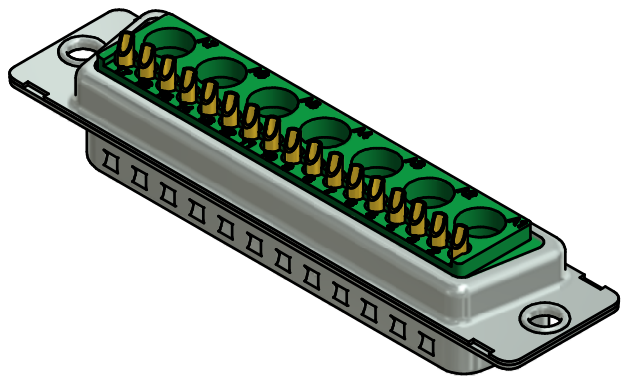


NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1 - A7
5. CONNECTOR IS PART MARKED: 3024W7PAM99A10X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			scale: 2:1 (5:1)				
							material: see notes				
				dim. in mm		title: D-SUB COMBINATION MALE 24W7P SOLDER CUP					
				date						name	
				drawn	16.03.15					Henneboel	
				appd.	16.03.15					Schmidt	
				norm							
d-old				dwg no: 13K1A4917		DIN-A3 sh: 1					
DO NOT ALTER CAD DRAWING BY HAND											
a	Original			part no: 3024W7PAM99A10X							
rev.	description	date	name								

CONEC®