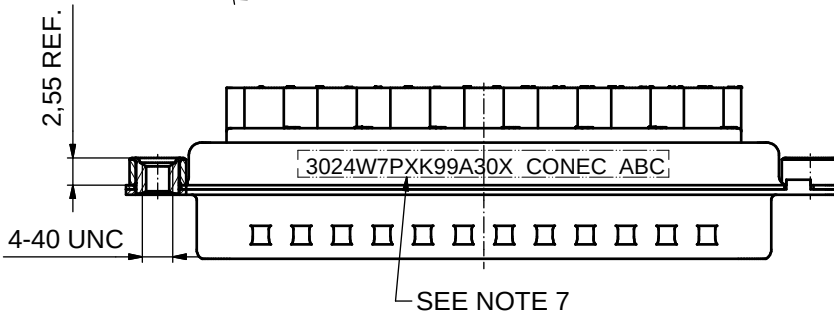
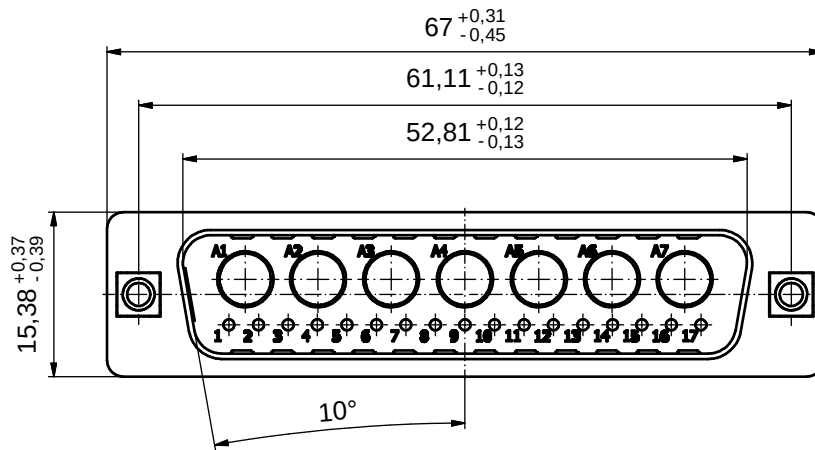
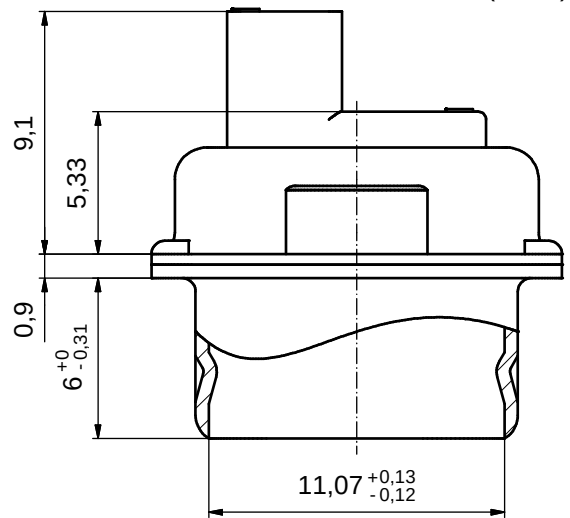
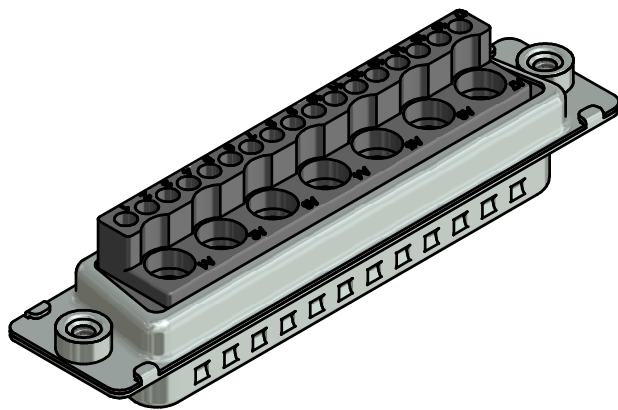


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR WILL BE SUPPLIED WITHOUT CONTACTS
4. THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3024W7PXXK99A30X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)		
								material: see notes		
					date	name	title: D-SUB COMBINATION MALE 24W7P CRIMP STYLE with threaded insert			
					drawn	27.07.12				Schmidt
					appd.	27.07.12				Koch
					norm					
					d-old		dwg no:		DIN-A3	
	a	Original						13K1A4029		sh: 1
	rev.	description	date	name				part no: 3024W7PXXK99A30X		