
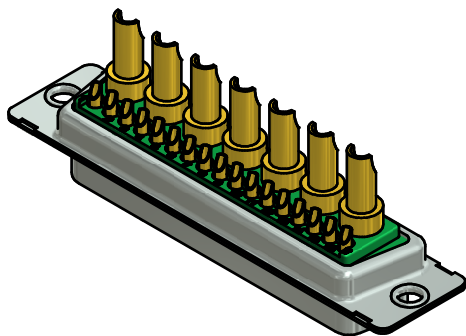
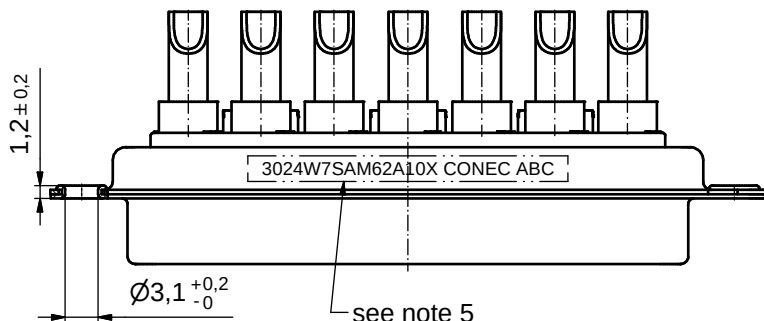


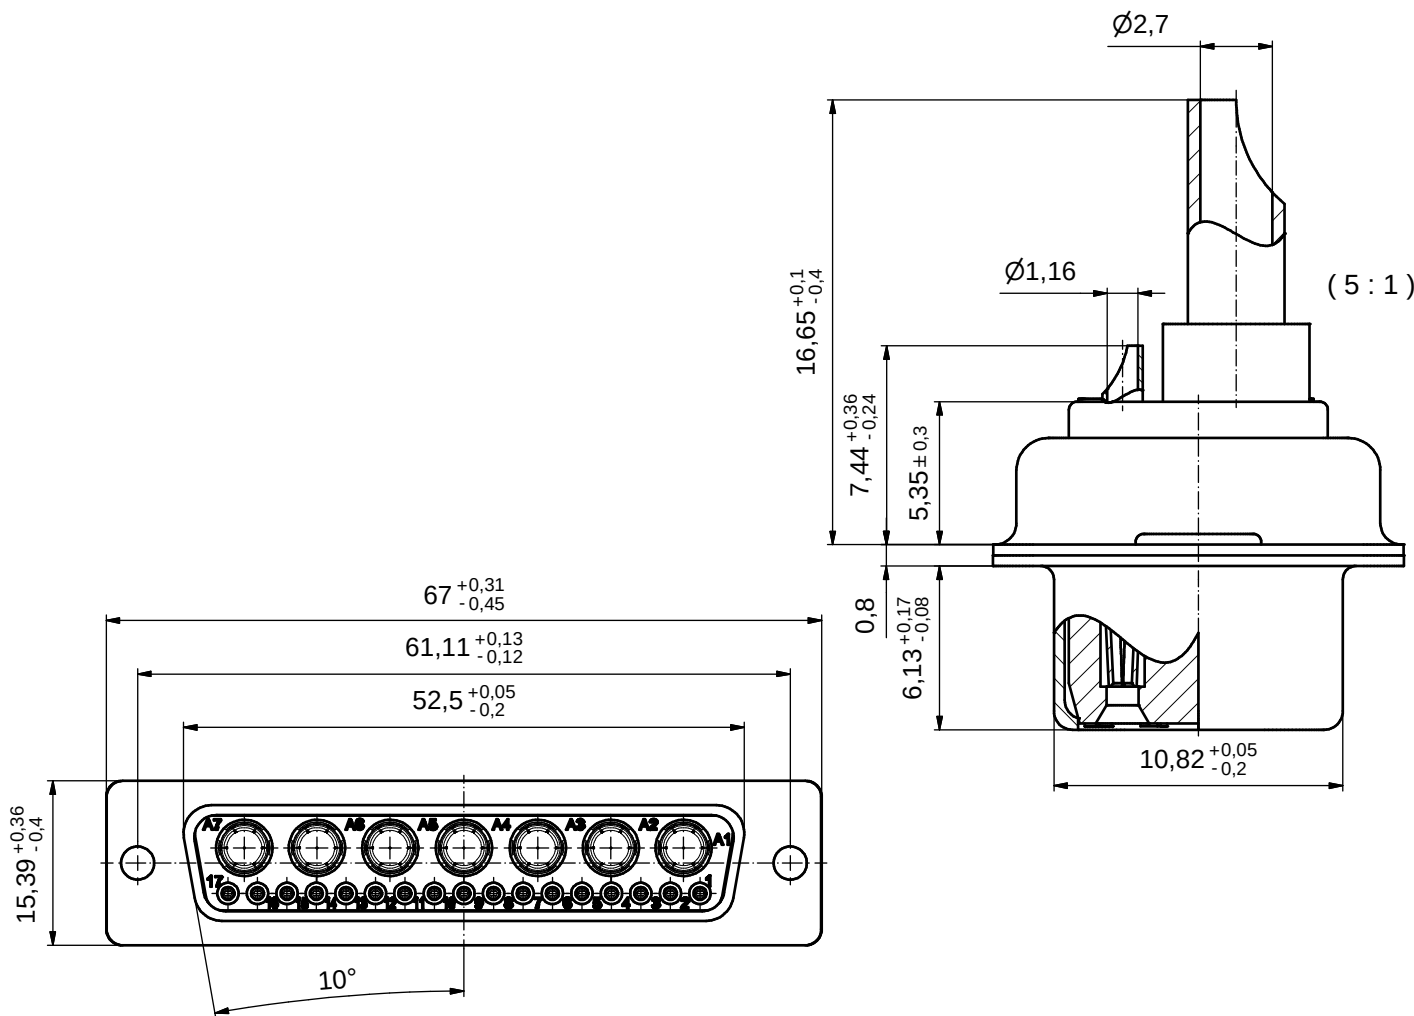

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING MATING AREA: GOLD FLASH over NICKEL
PLATING TERMINATION SIDE: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 12-14
5. CONNECTOR IS PART MARKED: 3024W7SAM62A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										
DO NOT ALTER CAD DRAWING BY HAND				tolerance ISO 2768-m			scale: 2:1 (5:1)			
				dim. in mm			material: see notes			
							title: D-SUB COMBINATION FEMALE 24W7S SOLDER CUP			
				date		name				
				drawn	01.08.13	Schmidt				
				appd.	01.08.13	Koch				
				norm						
d-old										
				dwg no:			DIN-A3 sh: 1			
a	Original									
rev.	description	date	name				part no: 3024W7SAM62A10X			