
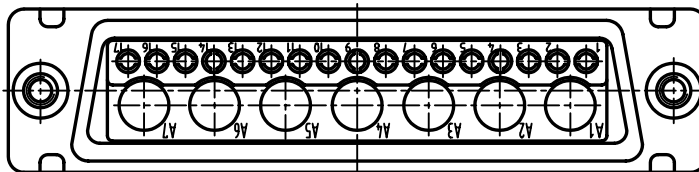
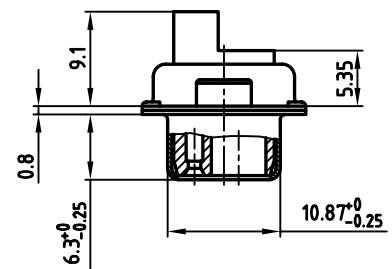
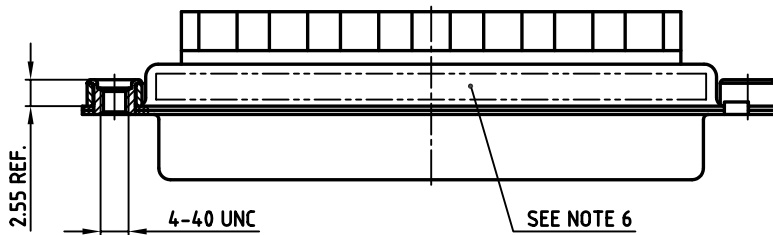


used for: D-SUB COMBINATION CRIMP

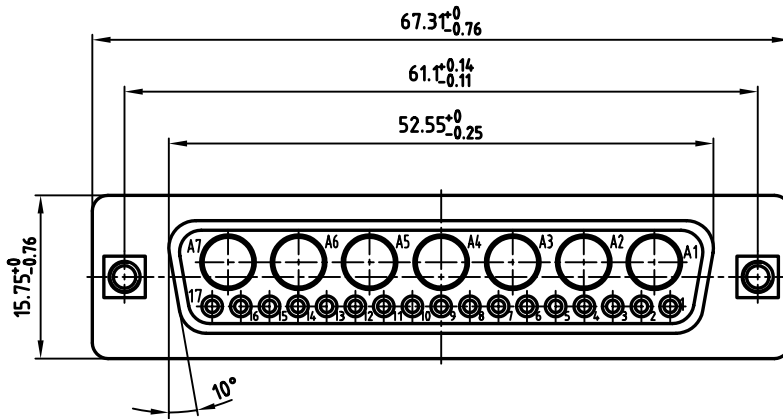

NOTES:

1. METAL SHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBTP GF UL 94 V-0, BLACK
3. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
4. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
6. CONNECTOR IS PART MARKED: 3024W7SXX99A30X CONEC ABC

Directive 2002/95 EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	date	name
2008	07.05.	Lehmenkühler
drawn	08.05.	Mickenbecker
appd.		
norm		
d-old		

scale:	2:1
material:	SEE NOTES
title: D-SUB COMBINATION FEMALE 24W7S CRIMP STYLE with threaded insert	
dwg no:	AutoCAD 2006 DIN-A
13K1A2500	
sh: 1/1	
part no: 3024W7SXX99A30X	