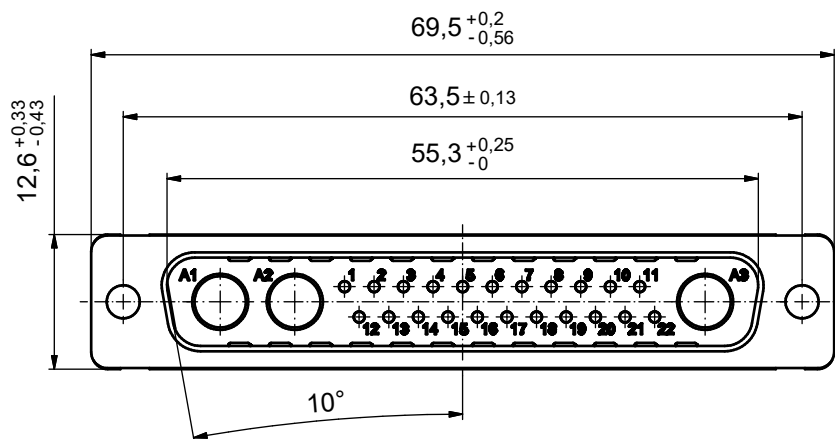
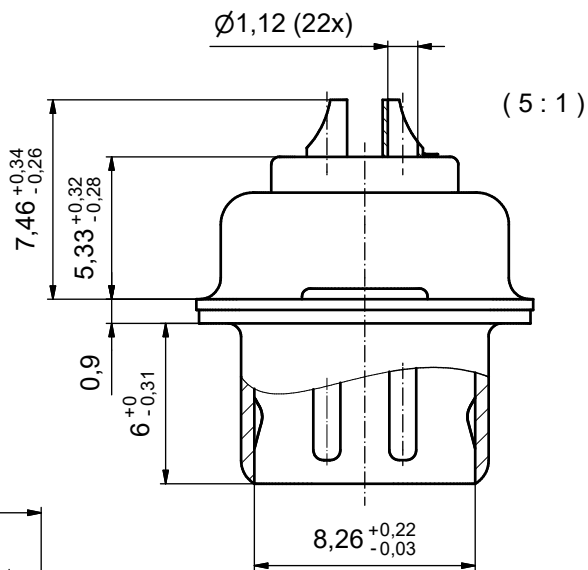
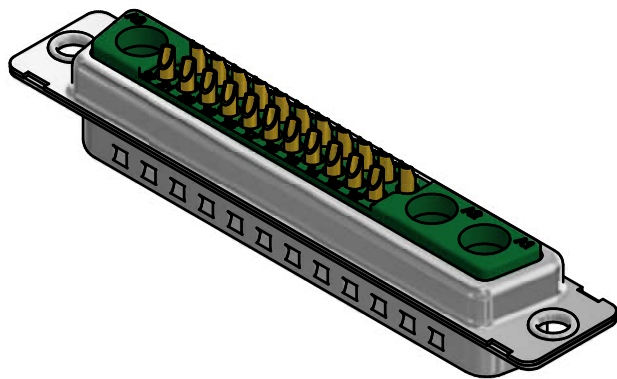


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1 - A3
5. CONNECTOR IS PART MARKED: 3025W3PAM99A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH. DO NOT ALTER CAD DRAWING BY HAND					tolerance			scale: 2:1 (5:1)	
					dim. in mm			material: SEE NOTES	
					date	name	title: D-SUB COMBINATION MALE 25W3P SOLDER CUP		
					drawn 09.01.13	Henneboel			
					appd. 09.01.13	Koch			
					norm				
					d-old				
							dwg no:		DIN-A3
	a	Original					13K1A4148		sh: 1
	rev.	description	date	name			part no: 3025W3PAM99A10X		