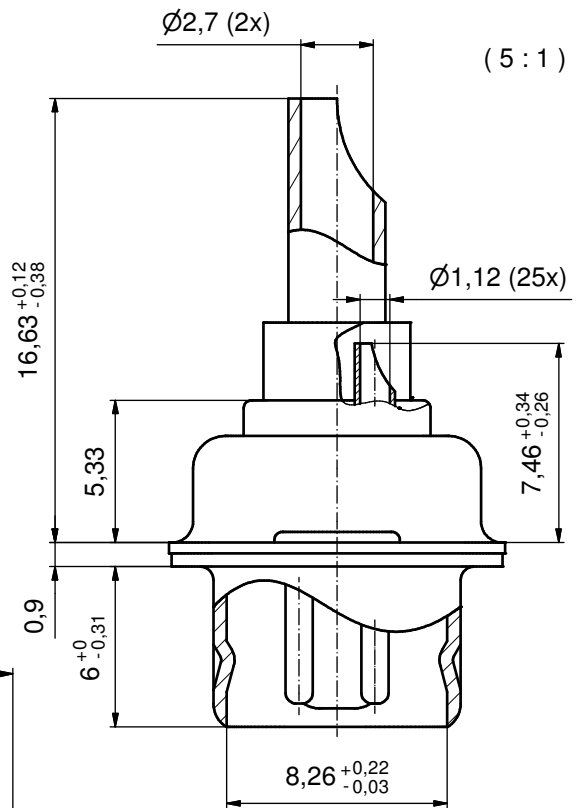
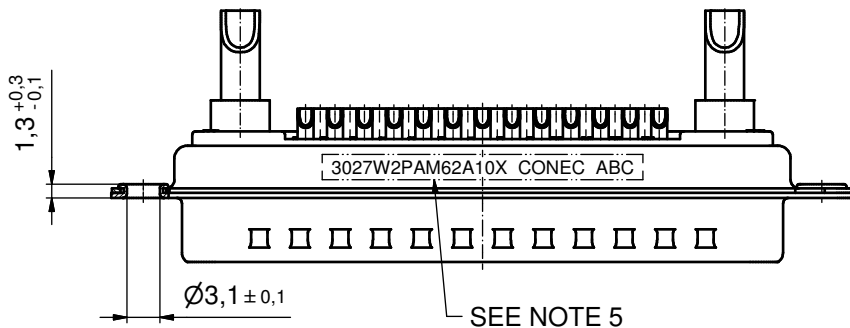
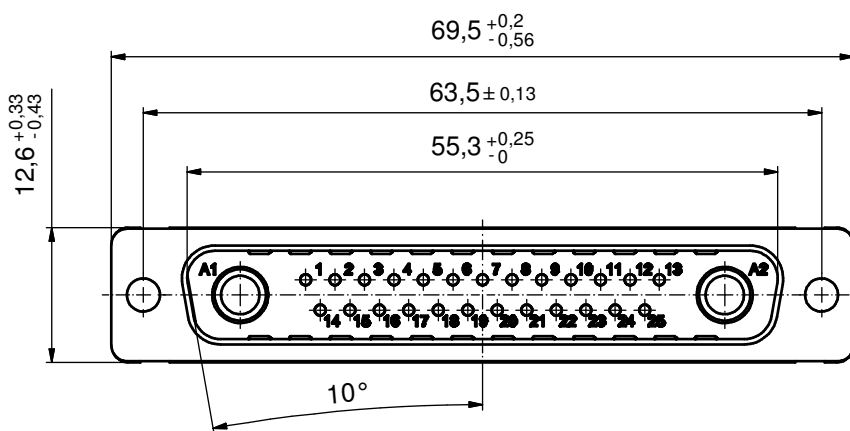
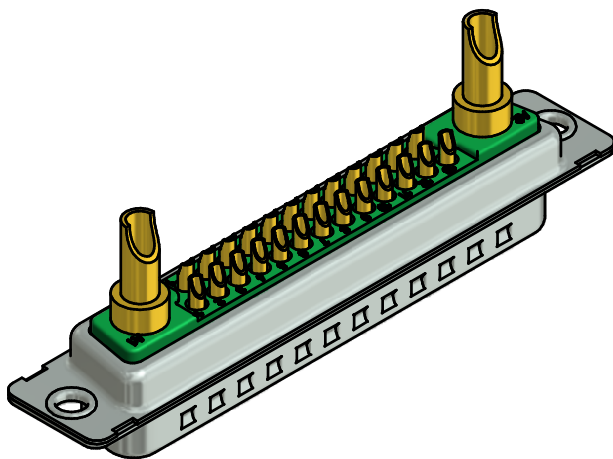


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 12-14
5. CONNECTOR IS PART MARKED: 3027W2PAM62A10X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)					
							material: SEE NOTES					
								date	name	title: D-SUB COMBINATION MALE 27W2P SOLDER CUP		
								drawn	18.12.14			Henneboel
								appd.	18.12.14			Lehmenkühler
								norm				
				d-old		dwg no: 13K1A4849						
	a	Original				DIN-A3						
rev.	description	date	name			sh: 1						
						part no: 3027W2PAM62A10X						