

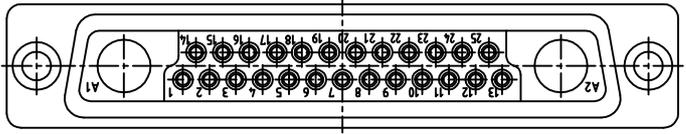

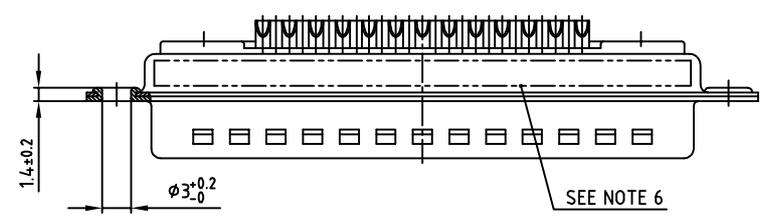


used for: D-SUB COMBINATION

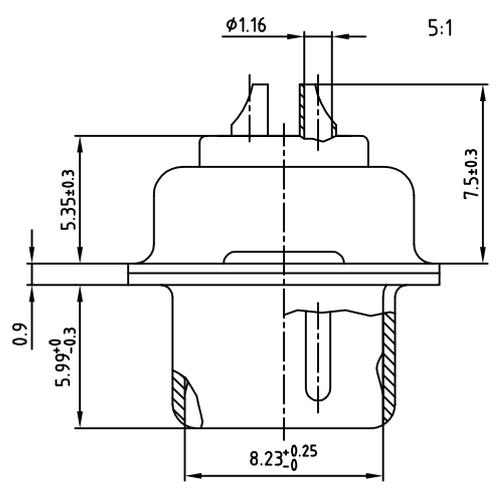

NOTES:

1. METALSHIELDS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY  
SOLDER CUP ACCEPTS CABLE AWG 20
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. NO CONTACTS ON POS. A1 + A2
6. CONNECTOR IS PART MARKED: 3027W2PCM99A10X CONEC ABC

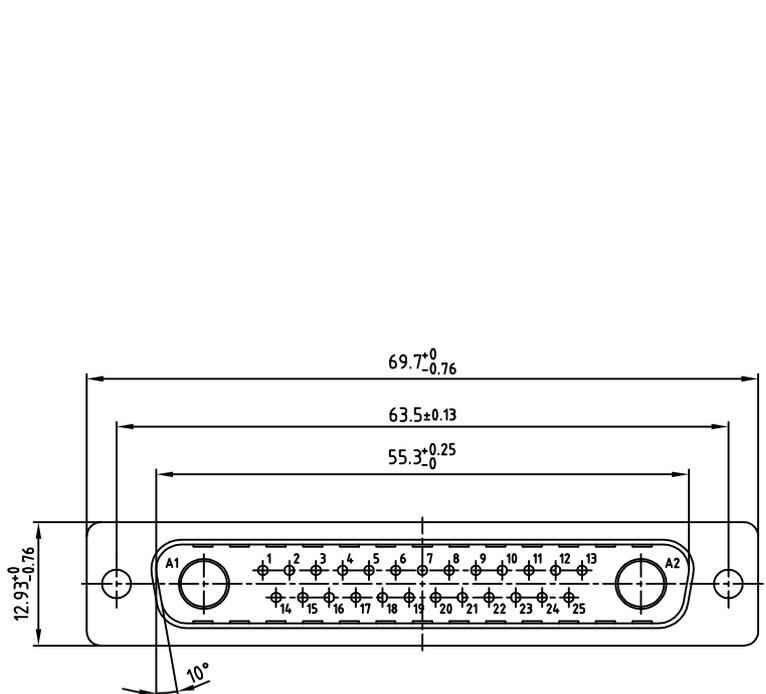

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	scale: 2:1 (5:1)
material:	SEE NOTES
title:	D-SUB COMBINATION MALE 27W2P SOLDER CUP
dwg no:	AutoCAD 2000 DIN-A 13K1A587 3 sh: 1/1
part no:	3027W2PCM99A10X

