



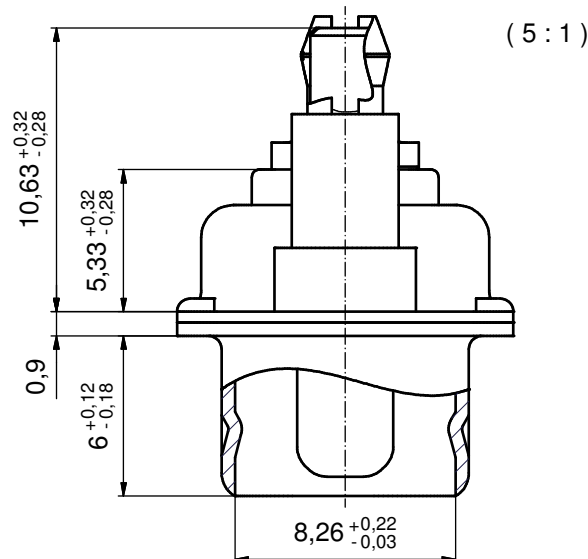
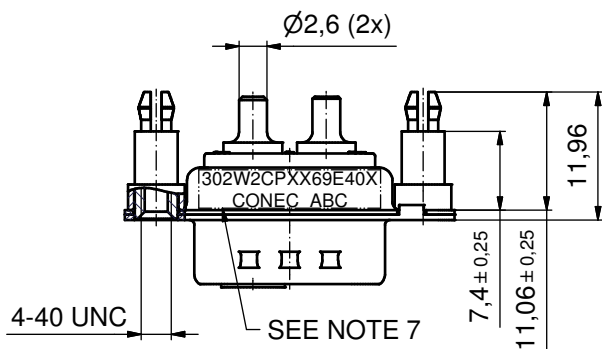


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

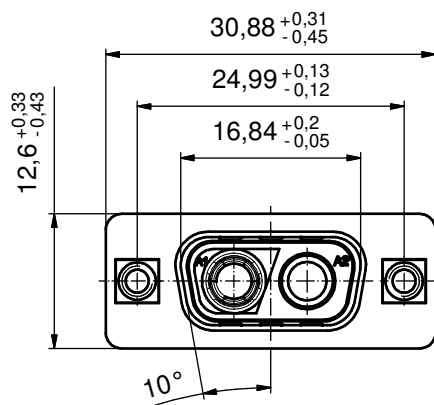

NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µm TIN over 80µm NICKEL
FEMALE CONTACT ON POS. A1; MALE CONTACT ON POS. A2
- THREADED SPACER CLIPS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
PCB-HOLE: $\varnothing 3.1 \pm 0.1$; PCB THICKNESS 2,3mm
- COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 302W2CPXX69E40X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				date	name	
				drawn	02.07.13	Henneboel
				appd.	02.07.13	Koch
				norm		
				d-old		
						
a	Original					
rev.	description	date	name			

scale:	2:1 (5:1)		
material:	SEE NOTES		
title:			
D-SUB COMBINATION MALE			
2W2CP			
with threaded spacer clip			
dwg no:			DIN-A3
13K1A4367			sh: 1
part no: 302W2CPXX69E40X			