

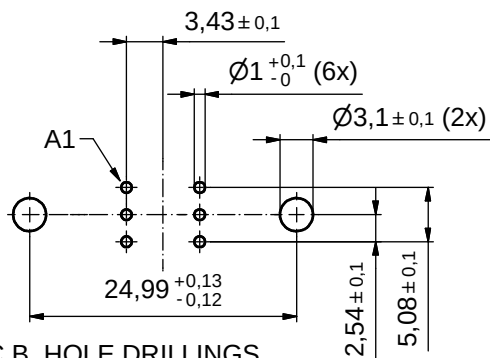


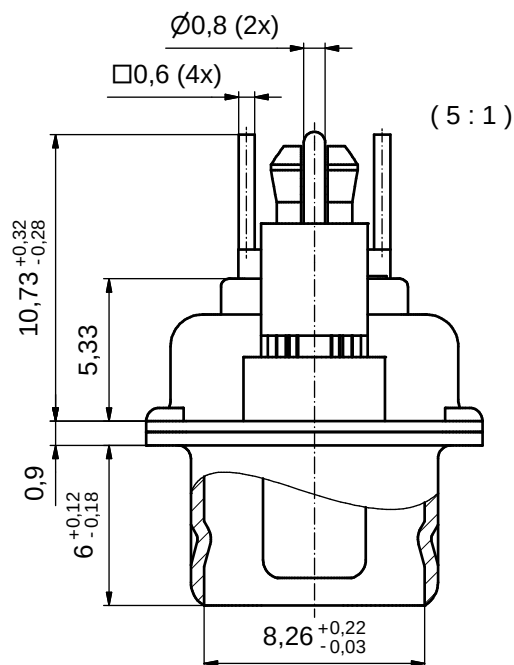



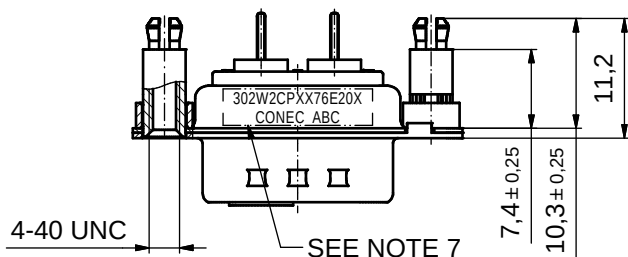

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

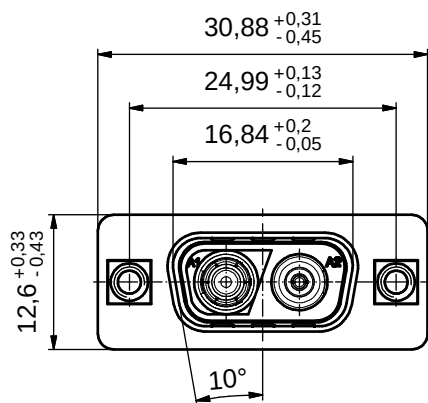

RoHS compliant

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATOR: PBT GF UL 94 V-0; GREEN
3. COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING, INNER CONDUCTOR: 50µin HARD GOLD over min. 50µin NICKEL
PLATING, OUTER CONDUCTOR:
MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL
TERMINATION SIDE: GOLD FLASH over NICKEL
FEMALE CONTACT ON POS. A1; MALE CONTACT ON POS. A2
4. THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\phi 3,1 \pm 0,1$ mm; PCB THICKNESS 1,6mm
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 302W2CPXX76E20X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			scale: 2:1 (5:1)					
				dim. in mm			material: SEE NOTES					
								date	name	title: D-SUB COMBINATON MALE 2W2CP with threaded spacer clip		
								drawn	13.07.15			Lehmenkühler
								appd.	14.07.15			Schmidt
								norm				
				d-old			dwg no: 13K1A5013					
a	Original								DIN-A3			
rev.	description	date	name				part no: 302W2CPXX76E20X		sh: 1			
DO NOT ALTER CAD DRAWING BY HAND												