

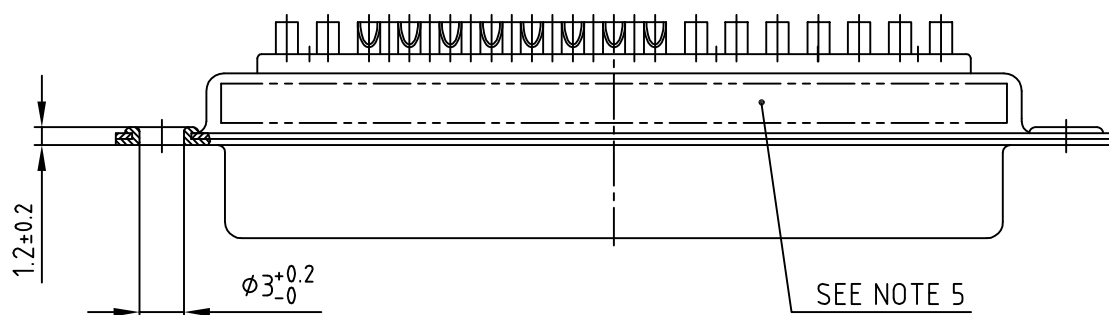
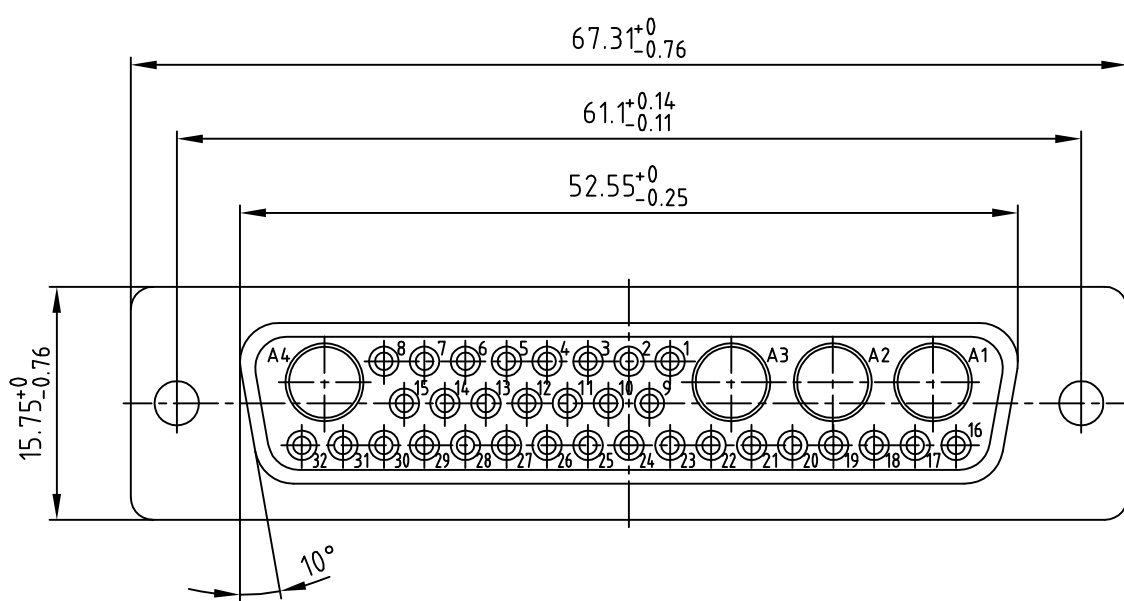


used for:	D-SUB COMBINATION
-----------	-------------------

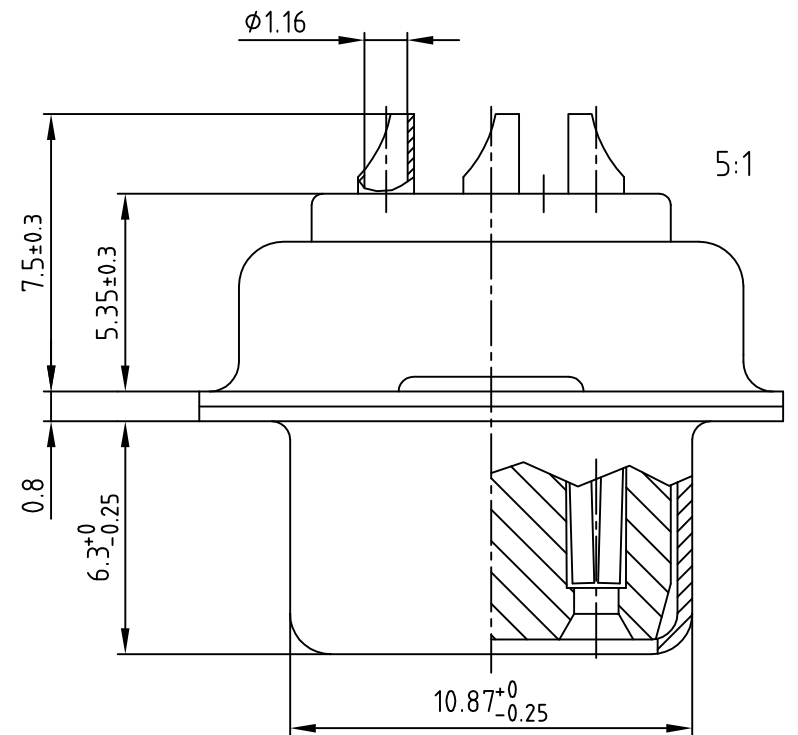

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD OVER min. 50µin NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACT ON POS. A1 - A4
5. CONNECTOR IS PART MARKED: 3036W4SAM99A10X CONEC A

Directive 2002/95/EC RoHS compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

a	Origin		
rev.	description	date	name



tolerance		 dim. in mm
2007	date	name
drawn	19.02.	Lehmenkühler
appd.	20.02.	Mickenbecker
norm		
d-old		

scale:	2:1 (5:1)		
material:	SEE NOTES		
title:	D-SUB COMBINATION FEMALE 36W4S SOLDER CUP		
dwg no:	AutoCAD 2006	DIN-A	
13K2A1234		3	
		sh: 1/1	
part no: 3036W4SAM99A10X			