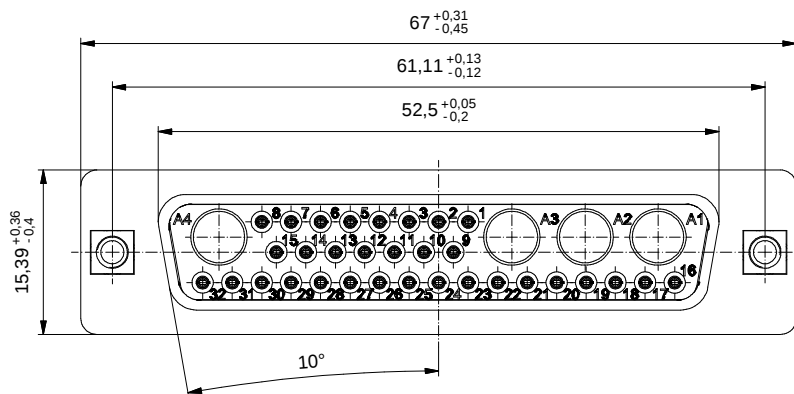
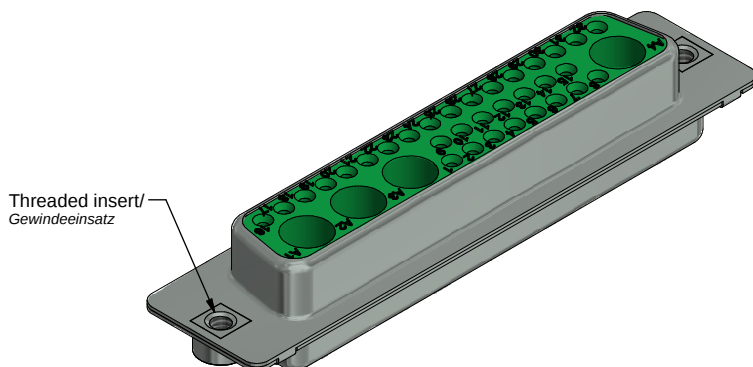
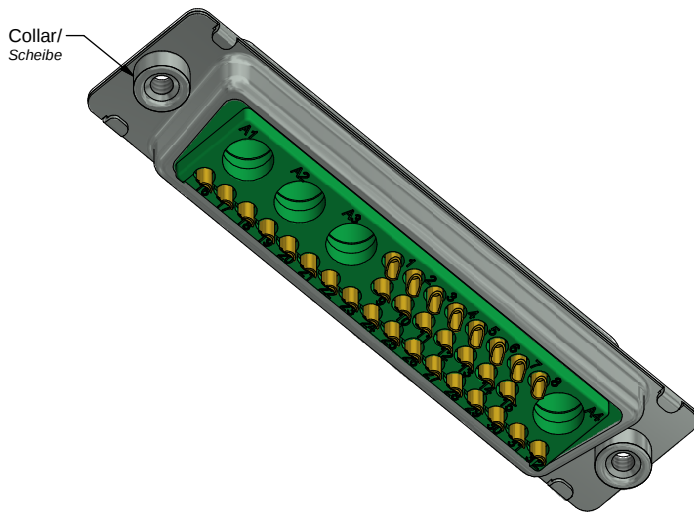


Technical specification:

Technische Daten:

Dielectric withstanding voltage/ Spannungsfestigkeit:	1000 V, 50 Hz 1 min.
Current rating/ Strombelastbarkeit:	7,5 A (UL), 5 A (CSA,VDE)
Insulation resistance/ Isolationswiderstand:	≥ 5 GΩ
Solder cup accepts cable/ Lötkelch geeignet für Kabel:	AWG 20
Temperature range/ Temperaturbereich:	- 55 °C ... + 125 °C
Mating cycles/ Steckzyklen:	Quality class 3 = 50 Gütestufe 3

Materials/

Werkstoffe:

Contact/ Kontakt:	Cu alloy, Au over Ni
Insulator/ Isolierkörper:	PBT GF UL 94 V-0, green/grün
Shell/ Gehäuse:	Steel, Sn over Ni
Threaded insert/ Gewindeeinsatz:	Cu alloy, Sn over Ni
Collar/ Scheibe:	Cu alloy, Sn over Ni

Installation specification/

Montagedaten:

Recommended torque value for thread/ empfohlenes Drehmoment für Gewinde:	max. 6 in.LB/ max. 67 Ncm
---	------------------------------

Part no. / Part marked Art.-Nr. / Bedruckung:	Contact plating/ Kontakt Veredelung:			
3036W4SAM99A30X	Signal contact Signalkontakt:	gold flash over nickel Gold über Nickel		
		No high power contact on pos. A1 - A4/ Kein Hochstromkontakt an Pos. A1 - A4		
			D-SUB Combination Female 36W4S with threaded insert D-SUB Combination Buchsenleiste 36W4S mit Gewindeeinsatz	
Index: a Original	Status: InBearbeitung			
RoHS compliant/ konform	Scale/ Maßstab: 2:1	dwg no / Z.-nr.: 13K1A5504		DIN-A3
				1 / 1