
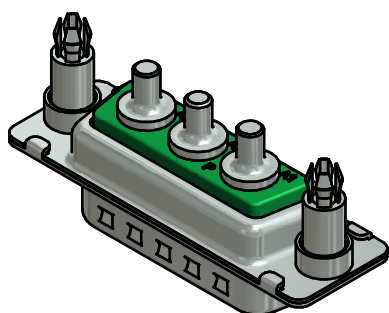
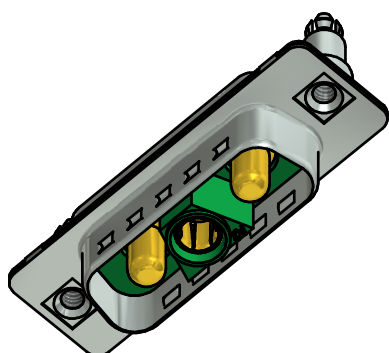

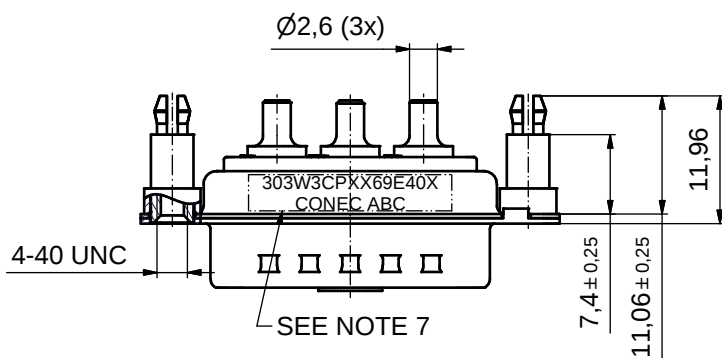
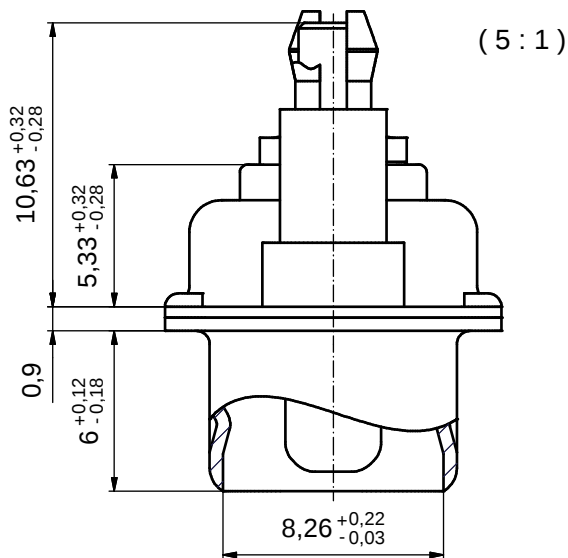


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

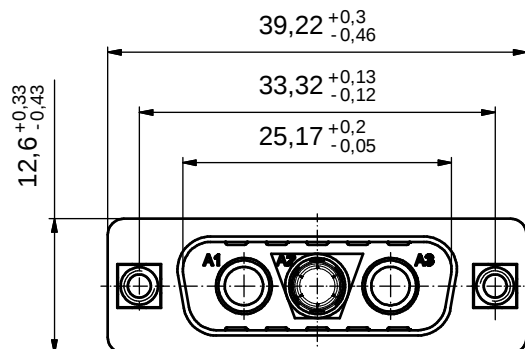

Directive 2002/95/EC RoHS compliant

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING MATING AREA: GOLD FLASH over NICKEL
PLATING TERMINATION SIDE: 160-240µin TIN OVER 80µin NICKEL
MALE CONTACT ON POS. A1 + A3; FEMALE CONTACT ON POS. A2
- THREADED REAR SPACER CLIPS: COPPER ALLOY; min. 200µin TIN OVER 80µin NICKEL
PCB-HOLE: Ø3,1±0,1; PCB THICKNESS 2,3mm
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 303W3CPXX69E40X CONEC ABC!

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)					
							material: SEE NOTES					
								date	name	title: D-SUB COMBINATION MALE 3W3CP with threaded spacer clip		
								drawn	17.06.13			Schmidt
								appd.	17.06.13			Koch
								norm				
								d-old				
										dwg no: 13K1A4346		DIN-A3 sh: 1
				a	Original							
				rev.	description	date	name			part no: 303W3CPXX69E40X		

CONEC

DIN-A3
sh: 1