


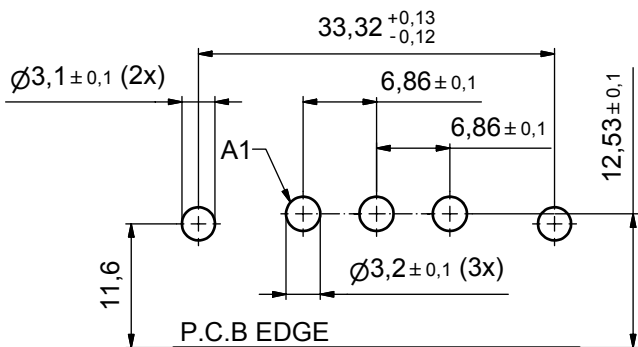
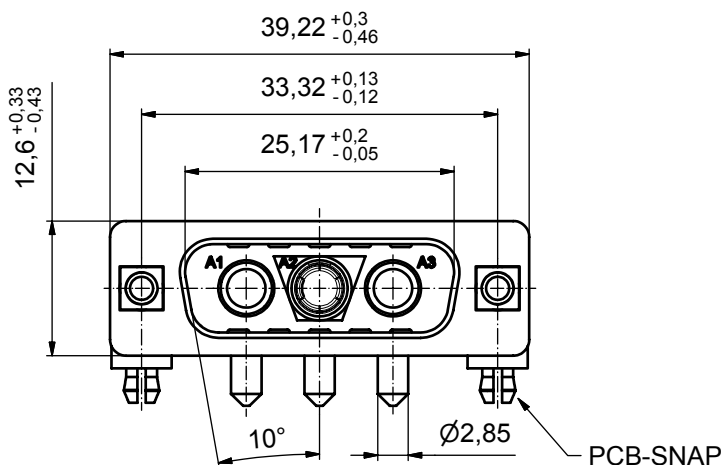


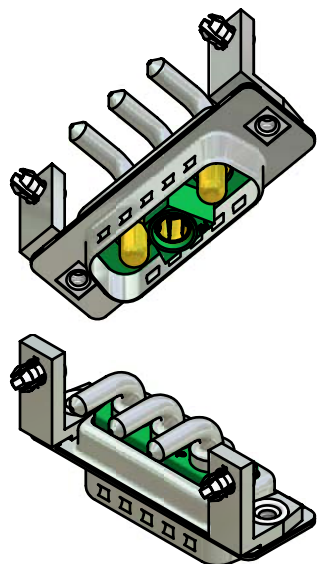

P.C.B HOLE DRILLINGS



PCB-SNAP

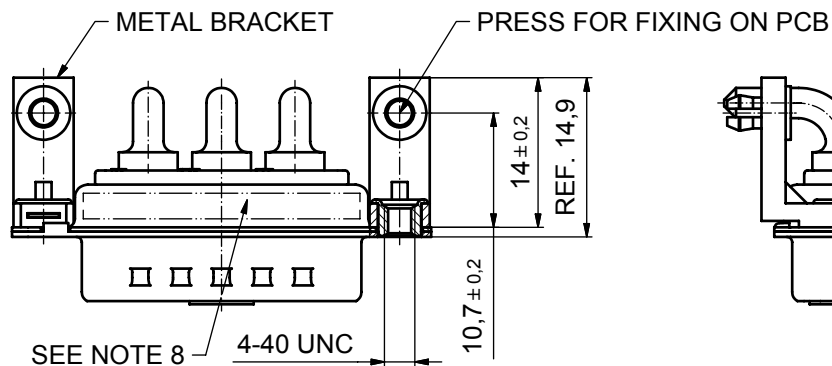

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN OVER 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING MATING AREA: 8µin HARD GOLD over min. 50µin NICKEL
PLATING TERMINATION SIDE: 200-280µin TIN over 80µin NICKEL
MALE CONTACT ON POS. A1 + A3; FEMALE CONTACT ON POS. A2
- METAL BRACKET: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN OVER 80µin NICKEL
- PCB-SNAP: COPPER ALLOY; min. 200µin TIN OVER 80µin NICKEL
PCB-HOLE: $\varnothing 3,1 \pm 0,1$; PCB THICKNESS 1.6mm
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 303W3CPXX73G40X CONEC ABC

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		 dim. in mm
	date	name
drawn	19.02.07	Lehmenkühler
appd.	19.02.07	Kühle
norm		
d-old		



scale:	2:1 (5:1)
material:	SEE NOTES
title:	D-SUB COMBINATION MALE 90°
	3W3CP
	with threaded insert, metal bracket and snap
dwg no:	Inventor 10
	13K1A1974
part no:	303W3CPXX73G40X
DIN-A3	sh: 1

CONEC