


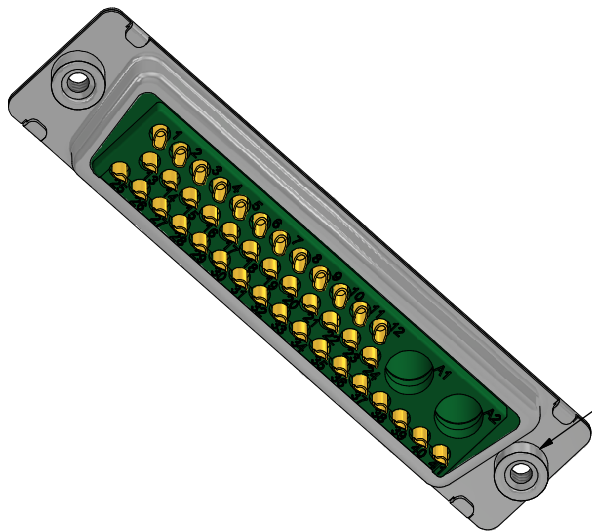
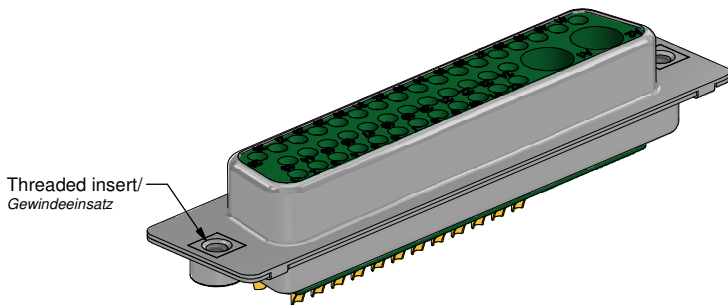




Collar/
Scheibe

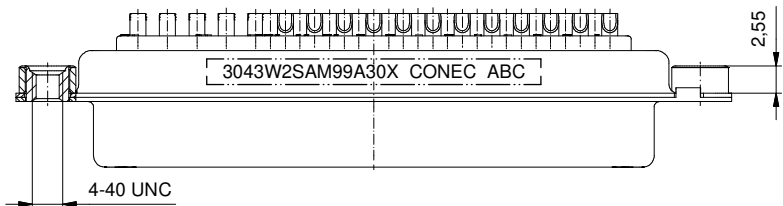

Threaded insert/
Gewindeeinsatz

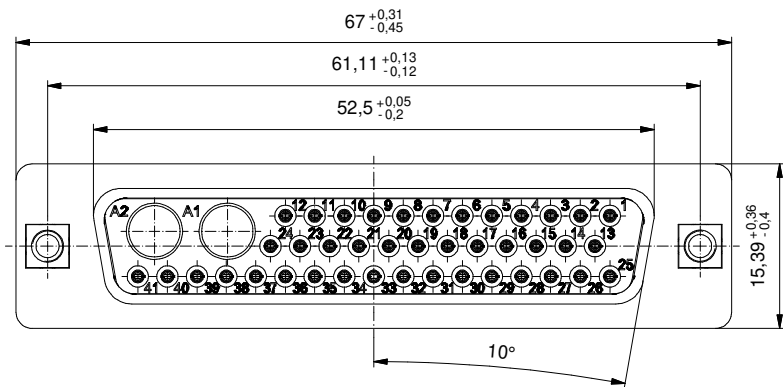

Technical specification/

Technische Daten:

Dielectric withstanding voltage/ <i>Spannungsfestigkeit:</i>	1000 V, 50 Hz 1 min.
Current rating/ <i>Strombelastbarkeit:</i>	7,5 A (UL), 5 A (CSA,VDE)
Insulation resistance/ <i>Isolationswiderstand:</i>	≥ 5 GΩ
Solder cup accepts cable/ <i>Lötkelch geeignet für Kabel:</i>	AWG 20
Temperature range/ <i>Temperaturbereich:</i>	- 55 °C ... + 125 °C
Mating cycles/ <i>Steckzyklen:</i>	Quality class 3 = 50 <i>Gütestufe 3</i>

Materials/

Werkstoffe:

Contact/ <i>Kontakt:</i>	Cu alloy, Au over Ni
Insulator/ <i>Isolierkörper:</i>	PBT GF UL 94 V-0, green/ <i>grün</i>
Shell/ <i>Gehäuse:</i>	Steel, Sn over Ni
Threaded insert/ <i>Gewindeeinsatz:</i>	Cu alloy, Sn over Ni
Collar/ <i>Scheibe:</i>	Cu alloy, Sn over Ni

Installation specification/

Montagedaten:

Recommended torque value for thread/ <i>Empfohlenes Drehmoment für Gewinde:</i>	max. 6 in.LB/max. 67 Ncm
--	--------------------------

Part no. / Part marked/ Art.-Nr. / Bedruckung:		Contact plating/ Kontakt Veredelung:			
3043W2SAM99A30X		Signal contact/ Signalkontakt:		gold flash over nickel Gold über Nickel	
		No contact on pos. A1 - A2/ Kein Kontakt an Pos. A1 - A2			
				dim. in mm	
general tolerance/ Allgemeintoleranz:				Date / Datum	
		drawn/ gez.		01.02.2022	
		appd./ gepr.		01.02.2022	
				Name	
				Henneboel	
				Lehmenkühler	
Index: a Original		scale / Maßstab: 2:1		D-SUB Combination Female 43W2S Solder cup with threaded insert	
				D-SUB Combination Buchse 43W2S Lötkelch mit Gewindeeinsatz	
RoHS compliant/ konform				dwg no / Z.-nr.: 13K1A6334	
				DIN- A3	
				1 / 1	