
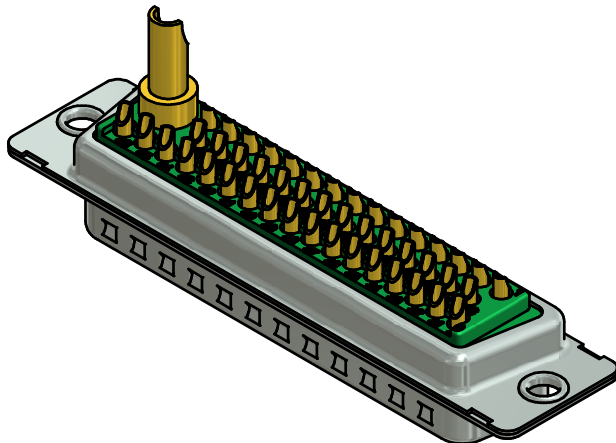

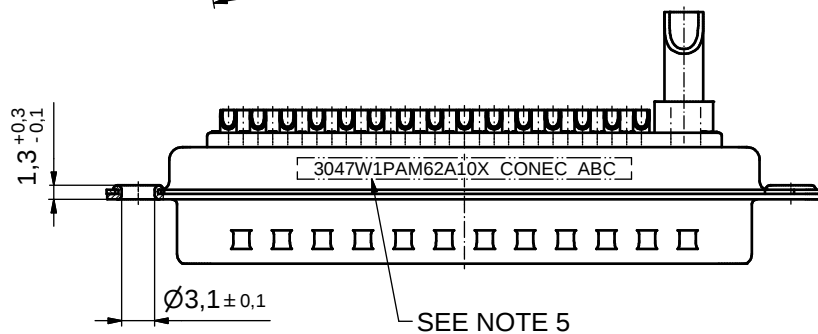
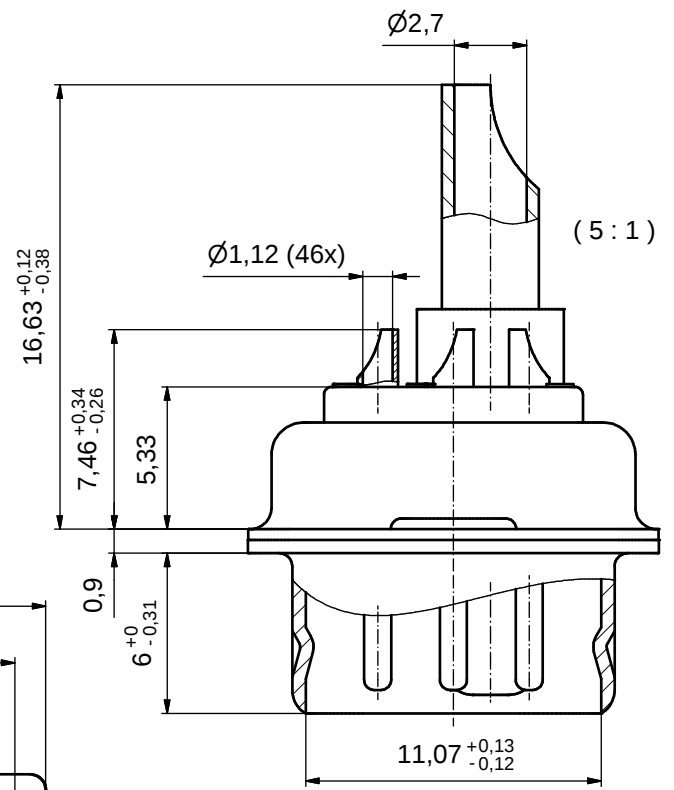


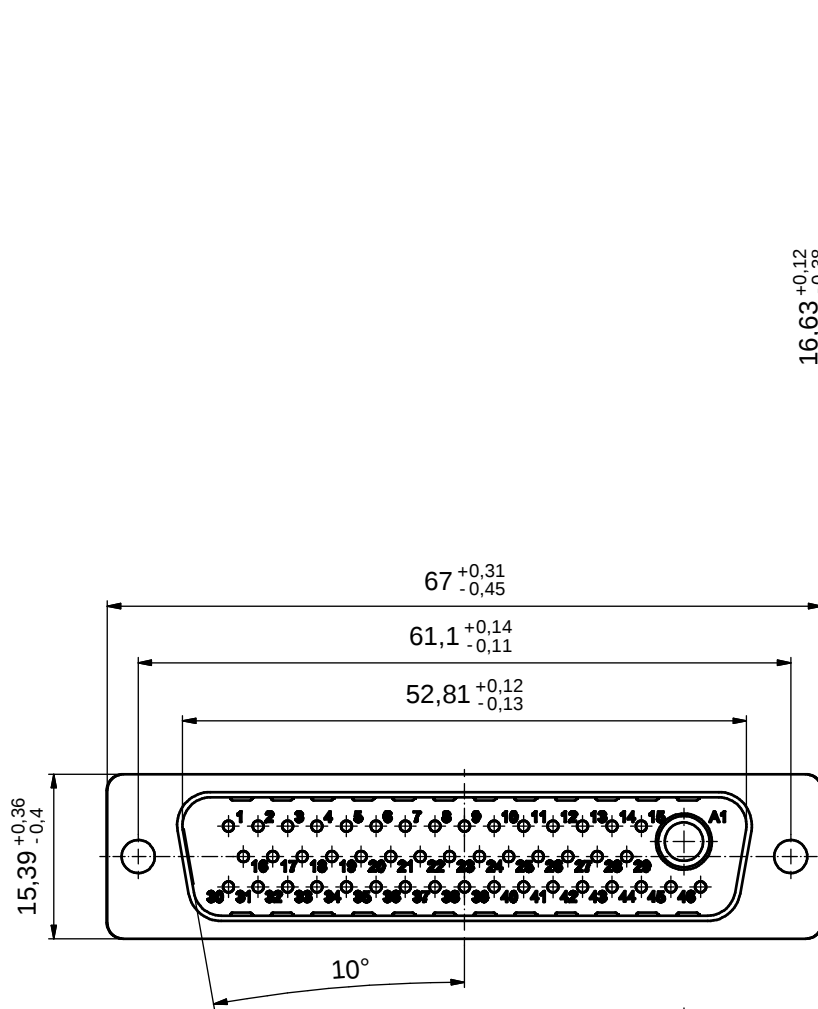

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- HIGH POWER CONTACT 20A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 12-14
- CONNECTOR IS PART MARKED: 3047W1PAM62A10X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					tolerance		 dim. in mm	scale: 2:1 (5:1)	
								material: SEE NOTES	
					date	name	title: D-SUB COMBINATION MALE 47W1P SOLDER CUP		
					drawn 21.11.14	Lehmenkühler			
					appd. 21.11.14	Schmidt			
					norm				
					d-old				
							dwg no: 13K1A4829		DIN-A3
	a	Original							sh: 1
	rev.	description	date	name					part no: 3047W1PAM62A10X