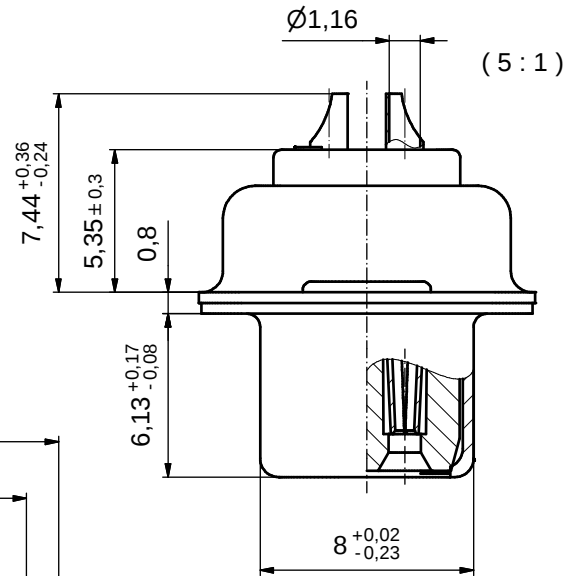
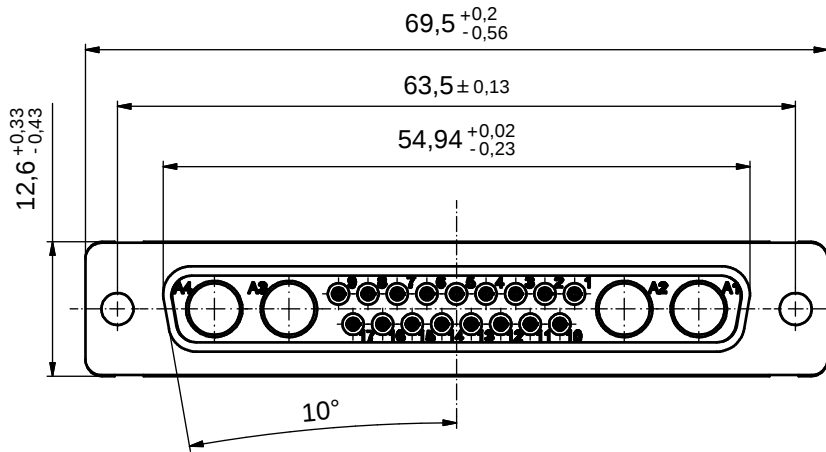


Directive 2002/95/EC
"RoHS"
Compliant

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- NO CONTACTS ON POS. A1 - A4
- CONNECTOR IS PART MARKED: 321WA4SAM99A10X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
					date	name
				drawn	16.11.2007	Sonnenberg
				appd.	16.11.2007	Mickenbecker
				norm		
				d-old		
a	Origin					
any description						

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB COMBINATION FEMALE 21WA4S SOLDER CUP	
dwg no: 13K1A2349	Inventor 10
DIN-A3	
sh: 1	
part no: 321WA4SAM99A10X	