
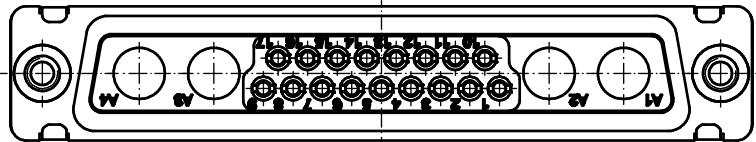

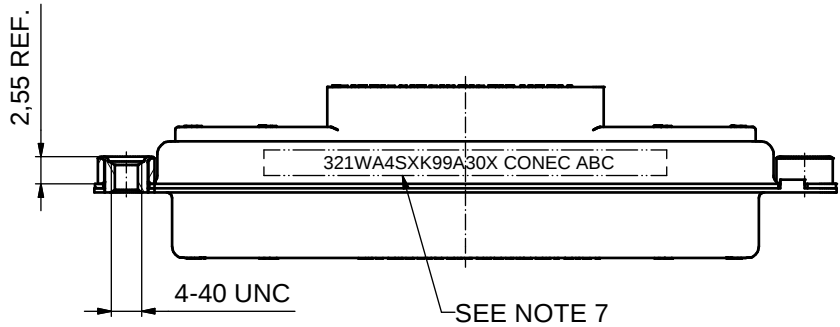
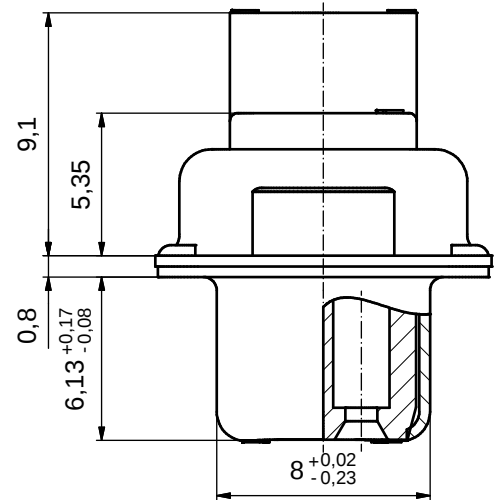


(5:1)

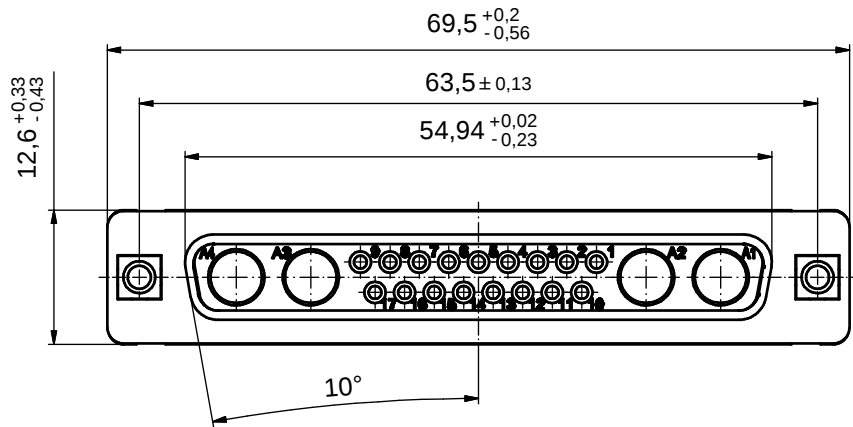

Directive 2002/95 EC
„RoHS“
Compliant

NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR WILL BE SUPPLIED WITHOUT CONTACTS
4. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
5. COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: **321WA4SXXK99A30X CONEC ABC**

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)	
				material: SEE NOTES				
				title:				
				D-SUB COMBINATION FEMALE				
DO NOT ALTER CAD DRAWING BY HAND				drawn	25.06.10	Petker	21W4S CRIMP STYLE	
				appd.	28.06.10	Koch	with threaded insert	
				norm			dwg no: Inventor 10	
				d-old			DIN-A3	
a	Origin					13K1A3255		sh: 1
rev.	description	date	name			part no: 321WA4SXXK99A30X		