
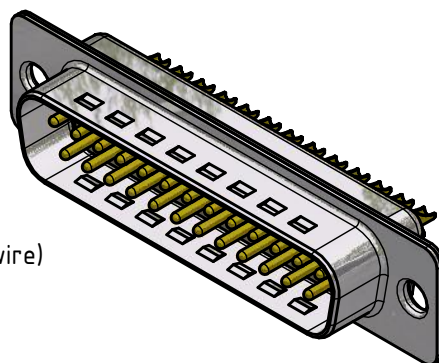
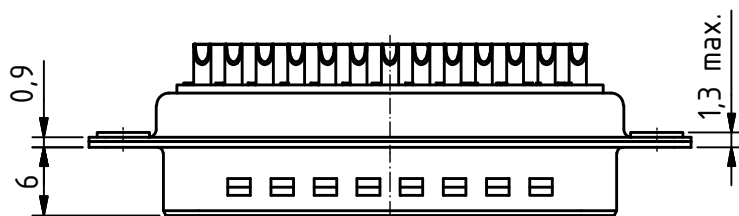



RoHS compliant

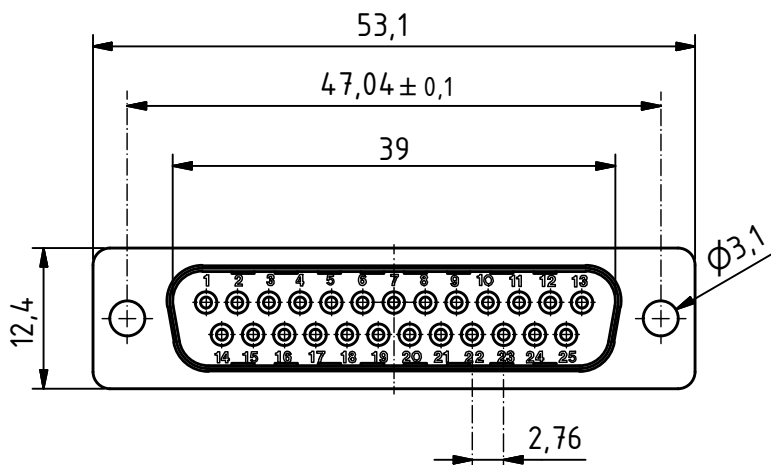

suitable for cable AWG 18 (single solid wire)


MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)				
size in mm		tolerances		
> 0,5 up to 3	> 3 up to 6	> 6 up to 30	> 30 up to 120	
±0,1	±0,2	±0,2	±0,3	

	All dimensions in mm	Rev.	Rev.	Rev.	DE001227		
		Rev.	Rev.	Rev.	part no.		
DTS25PZ/2				1.5:1 scale	drawn	31.10.2008	mr
					checked		
					approved		
 CONNECT 2 CUSTOMIZE				Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss			K050011 drawing no.