
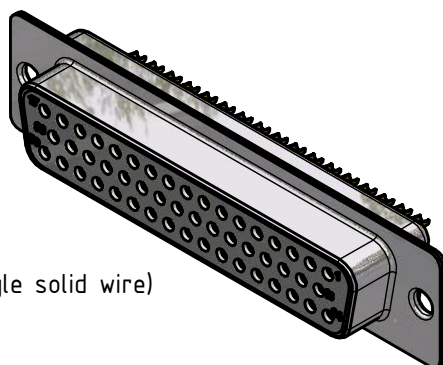



RoHS compliant

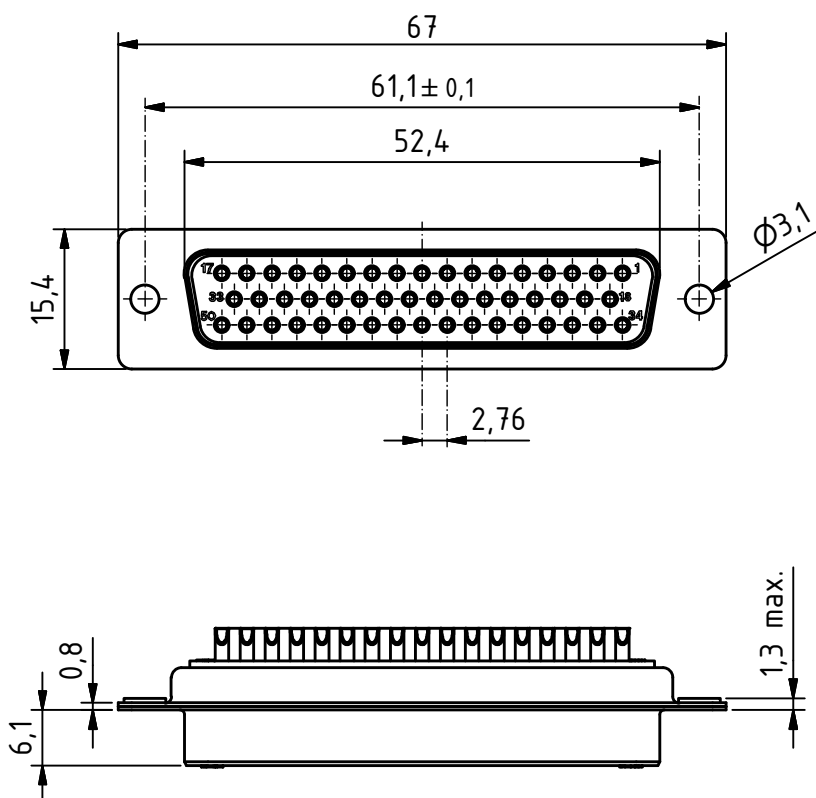

suitable for cable AWG 18 (single solid wire)

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)				
size in mm				
> 0.5	> 3	> 6	> 30	
up to 3	up to 6	up to 30	up to 120	
tolerances				
±0.1	±0.2	±0.2	±0.3	



All dimensions in mm

Rev. a) 29.03.2010 mr

Rev.

Rev.

DE002196

part no.

DTS50SZ/2

1.2:1
scale

drawn

27.01.1998

mr

checked

approved

DELTRON
CONNECT 2 CUSTOMIZE

Industrie Neuhof 8c
CH-3422 Kirchberg
www.d-sub.swiss

K050020 a
drawing no.