
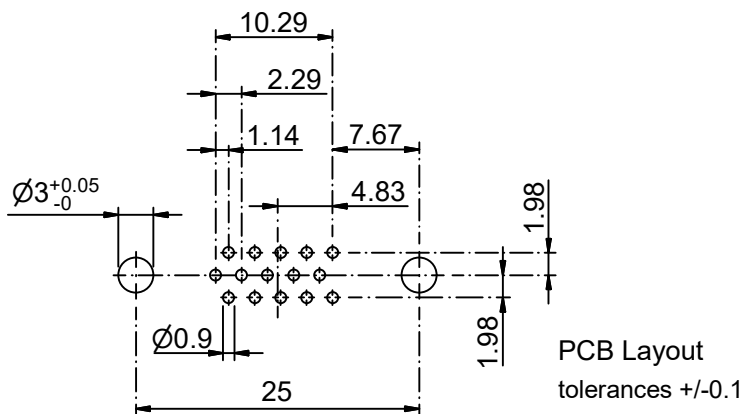

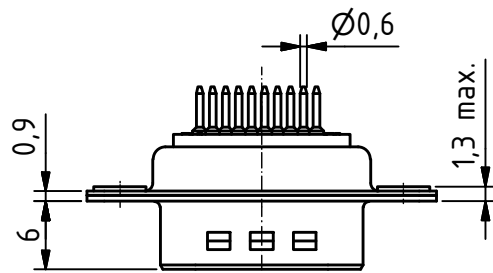



RoHS compliant

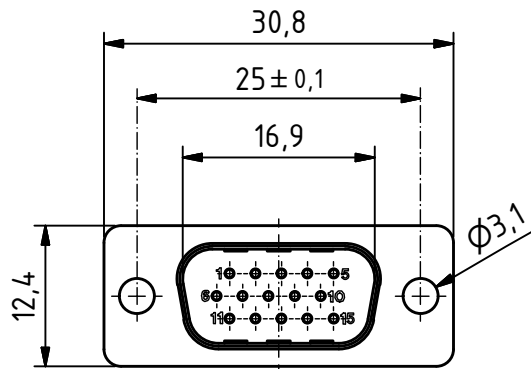

Product is
suitable for
Wave Solder
Process


General tolerances (Delttron standard)			
size in mm		tolerances	
> 0.5	> 3	> 6	> 30
up to 3	up to 6	up to 30	up to 120
±0.1	±0.2	±0.2	±0.3

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

	All dimensions in mm	Rev. a) 13.12.2009 mr	Rev.	Rev.	DE013825		
		Rev.	Rev.	Rev.	part no.		
HD-D15PY/2				1.5:1 scale	drawn	15.04.2008	mr
					checked		
					approved		
				K060347 a			
				drawing no.			
Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss							