
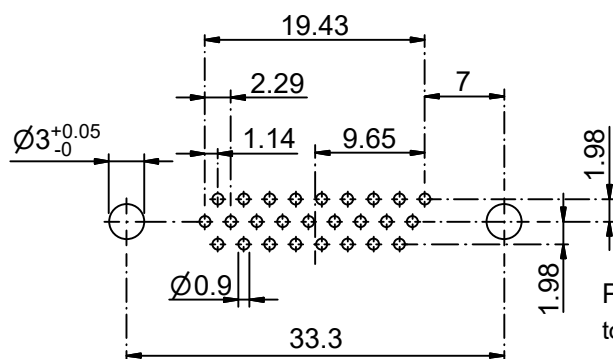
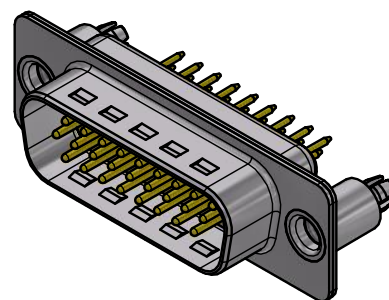
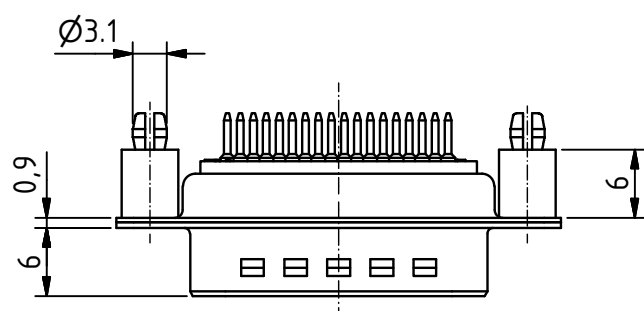



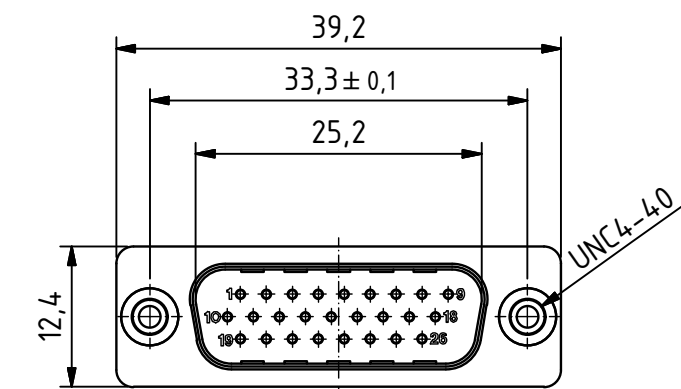

PCB Layout
tolerances +/-0.1

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Delttron standard)				
size in mm	tolerances			
	> 0.5 up to 3	> 3 up to 6	> 6 up to 30	> 30 up to 120
	±0.1	±0.2	±0.2	±0.3

modification	Rev. a) 13.12.2009 mr	Rev.	Rev.	DE008872 part no.		
	Rev.	Rev.	Rev.			
HD-D26PY/2M86UN			1.5:1 scale	drawn	02.11.2009	nf
				checked		
				approved		
DELTRON CONNECT 2 CUSTOMIZE			Industrie Neuhaus 8c CH-3422 Kirchberg www.d-sub.swiss	K060494 a drawing no.		