
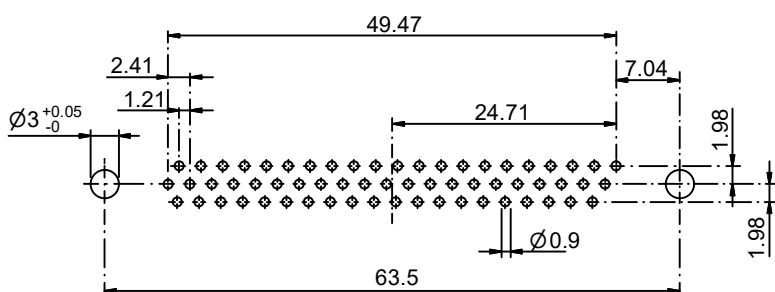
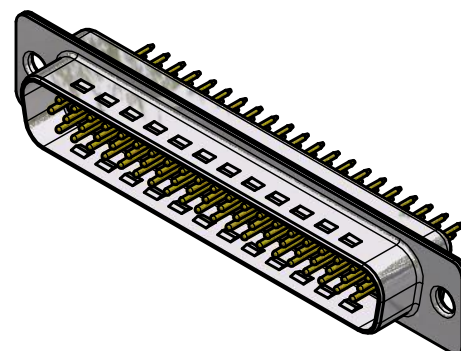
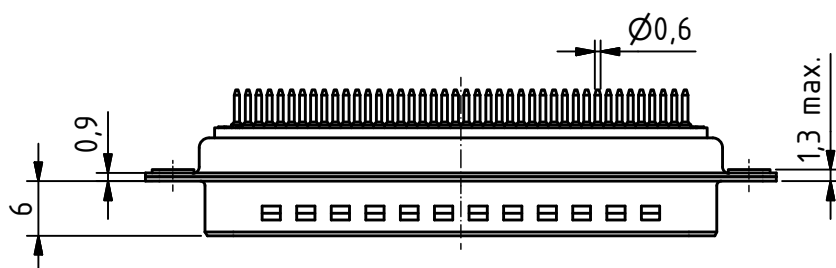



RoHS compliant

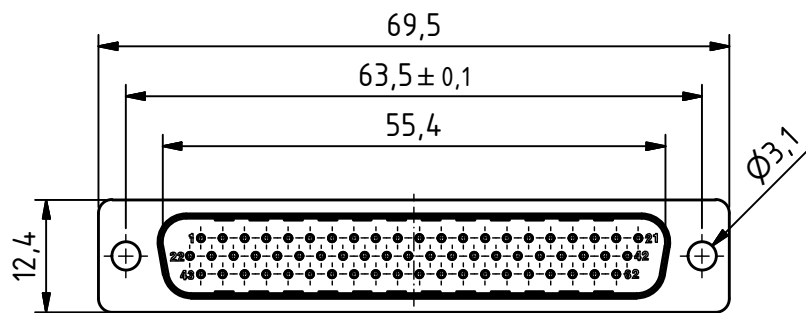

PCB Layout
tolerances +/-0.1

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

Product is
suitable for
Wave Solder
Process

General tolerances (Delttron standard)			
size in mm	tolerances		
	> 0.5 up to 3	> 3 up to 6	> 6 up to 30
> 30 up to 120	±0.1	±0.2	±0.3



All
dimensions
in mm

Rev.
Rev.

Rev.
Rev.

Rev.
Rev.

DE015780
part no.

HD-D62PY/2

1.2:1
scale

drawn
checked
approved

18.01.2012

nf

DELTRON
CONNECT 2 CUSTOMIZE

Industrie NeuhoF 8c
CH-3422 Kirchberg
www.d-sub.swiss

K060806
drawing no.