
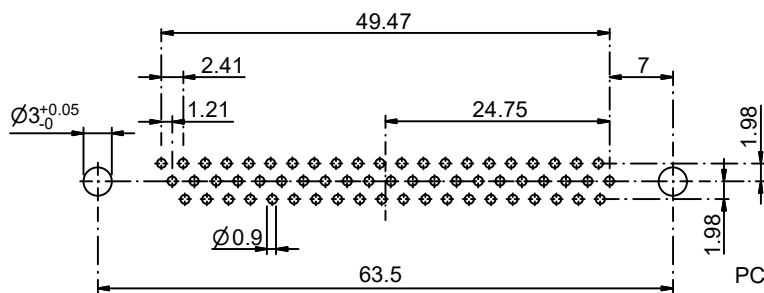
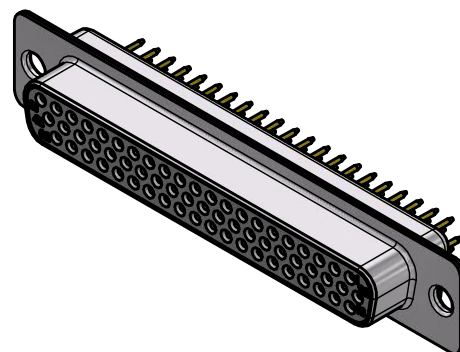
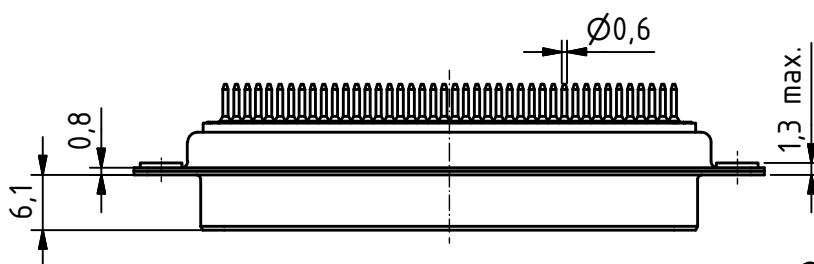



RoHS compliant

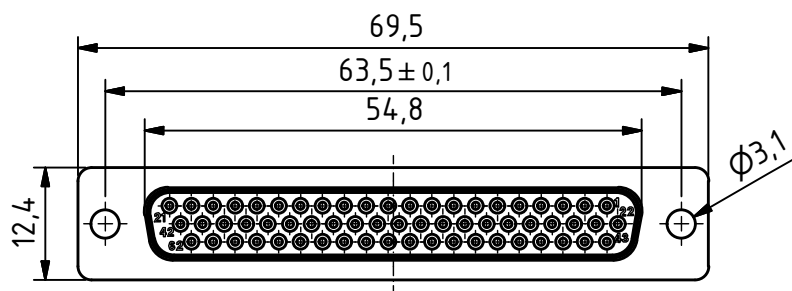

PCB Layout
tolerances +/-0.1

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)				
size in mm				
> 0,5	> 3	> 6	> 30	
up to 3	up to 6	up to 30	up to 120	
tolerances				
±0,1	±0,2	±0,2	±0,3	

modification	Rev.	Rev.	Rev.	DE012989		
	Rev.	Rev.	Rev.	part no.		
HD-D62SY/2			1.2:1	drawn	18.01.2012	nf
			scale	checked		
				approved		
DELTRON CONNECT 2 CUSTOMIZE			Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss	K060805		
				drawing no.		