


Artikelnr. / Item no.	Bezeichnung / Description	Länge / Length (L)
38659	DAT micro-USB 0,5m schwarz PL	500 ± 20 mm
38665	DAT micro-USB 0,5m weiss PL	500 ± 20 mm
46800	DAT micro-USB 1,0m schwarz PL	1000 ± 30 mm
43837	DAT micro-USB 1,0m weiss PL	1000 ± 30 mm
38660	DAT micro-USB 2,0m schwarz PL	2000 ± 30 mm
38666	DAT micro-USB 2,0m weiss PL	2000 ± 30 mm

#### Aderquerschnitt / Wire cross section

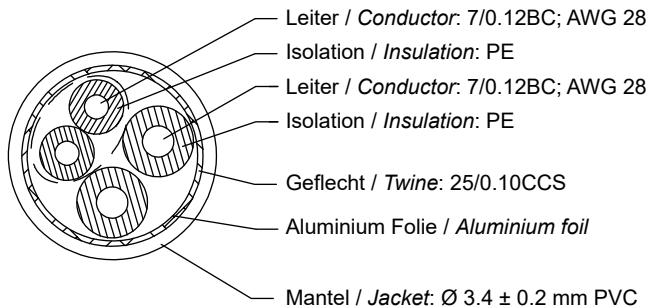

#### Pin-Belegung / Pin Assignment

USB-A	Micro USB
1 rot / red	1
2 weiß / white	2
3 grün / green	3
4 schwarz / black	5
SHELL	SHELL



#### Micro USB Lade- und Synchronisationskabel

- Datenübertragungsrate von bis zu 480 Mbit/s  
- beidseitiger Knickschutz

Anschlüsse: USB 2.0-Stecker (Typ A),  
USB 2.0-Micro-Stecker (Typ B)  
Kontakte: vernickelt  
Nennspannung: 5 V ===  
Leitungswiderstand: 5 Ω max.  
Isolationswiderstand: 300 V ===, 10 MΩ  
Material: PVC  
Kabeltyp: Rundkabel

#### Micro USB charging and sync cable

- data transmission rate of up to 480 Mbit/s  
- kink protection on both sides

Connectors: USB 2.0 plug (type A),  
USB 2.0 micro plug (type B)  
Contacts: nickel plated  
Rated voltage: 5 V ===  
Conductive resistance: 5 Ω max.  
Insulation resistance: 300 V ===, 10 MΩ  
Material: PVC  
Cable type: round cable

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 16.06.2022	aw	DAT micro-USB Xm weiß PL	1/1
		gepr.: 16.06.2022	aw		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change				38659, 38665 46800, 43837, 38660, 38666	

