


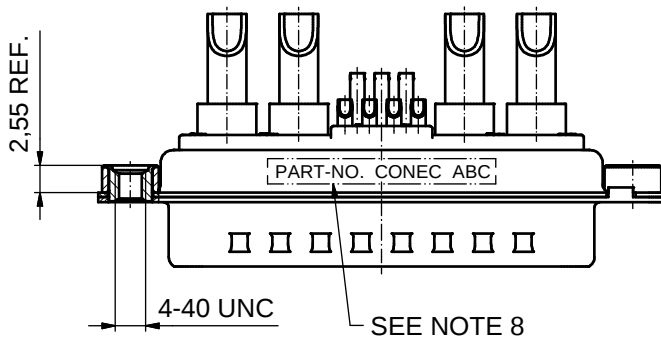
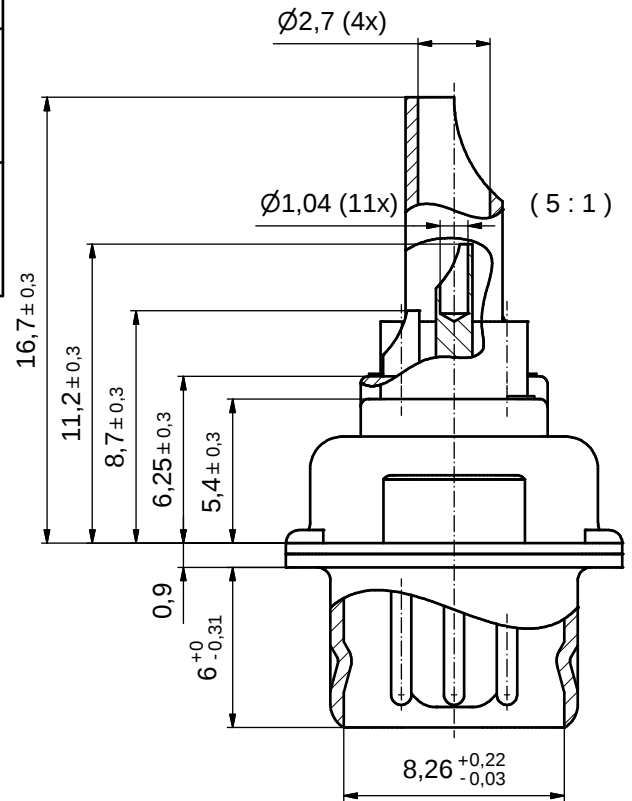


CONTACT PLATING	PART-NO.
SIGNAL CONTACTS GOLD FLASH over NICKEL	3H15W4PAM62A30X
HIGH POWER CONTACTS PLATING MATING AREA: GOLD FLASH over NICKEL PLATING TERMINATION SIDE: GOLD FLASH over NICKEL	
SIGNAL CONTACTS 30µin HARD GOLD over 50µin NICKEL	
HIGH POWER CONTACTS PLATING MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL PLATING TERMINATION SIDE: GOLD FLASH over NICKEL	3H15W4PCM42A30X

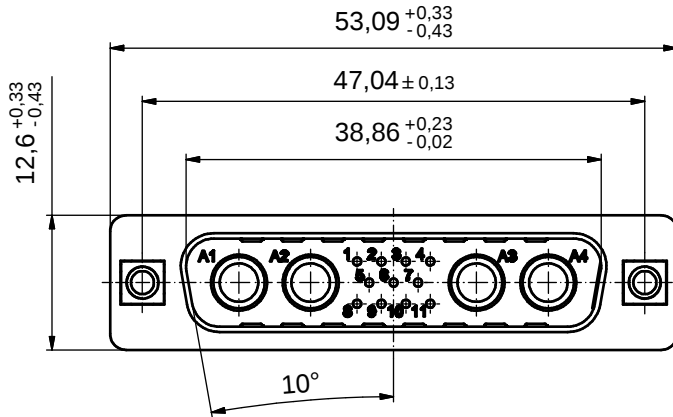

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: SEE TABLE
SOLDER CUP ACCEPTS CABLE AWG 22
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING: SEE TABLE
SOLDER CUP ACCEPTS CABLE AWG 12-14
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

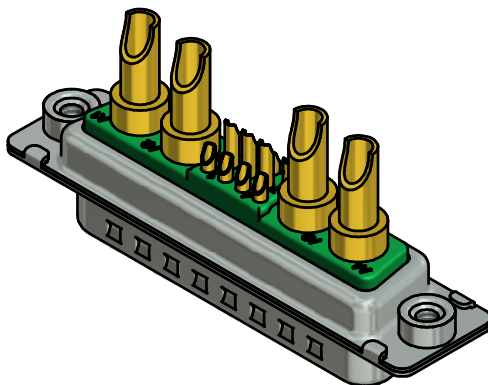

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										tolerance			 dim. in mm		scale:		2:1 (5:1)						
															material:		SEE NOTES						
															date	name		title: D-SUB HD COMBINATION MALE 15W4P SOLDER CUP with threaded insert					
															drawn	24.11.10	Lehmenkühler						
															appd.	24.11.10	Koch						
															norm								
															d-old			dwg no:				DIN-A3	
											a	Origin						13K1A3494				sh: 1	
											rev.	description											
													part no:				SEE TABLE						