
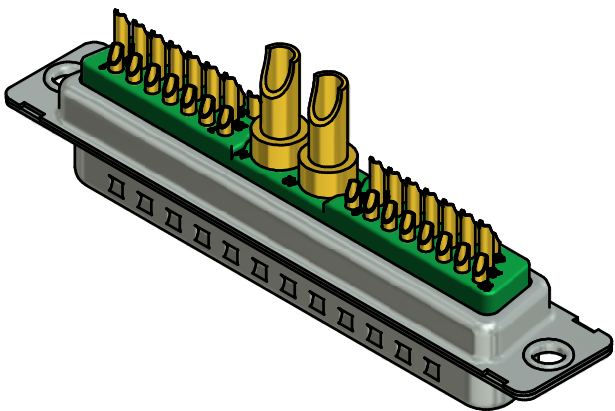

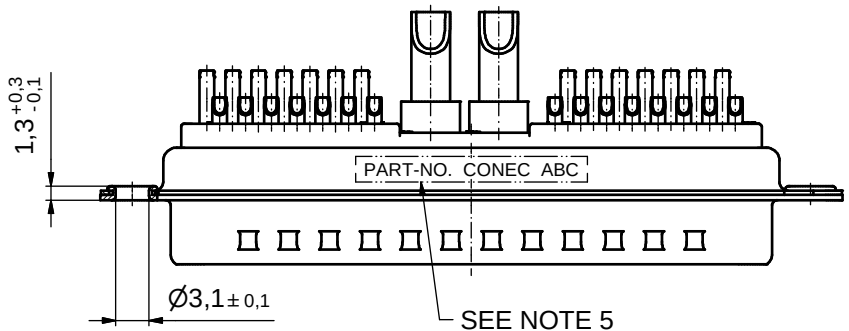
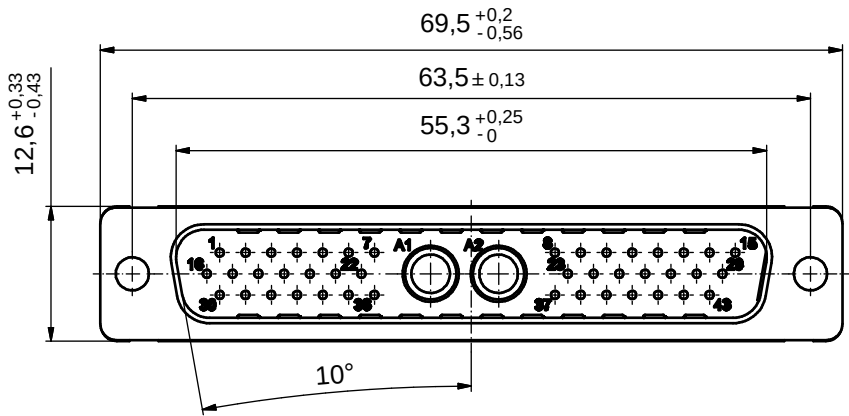


CONTACT PLATING	PART-NO.
SIGNAL CONTACTS GOLD FLASH over NICKEL	3H45W2PAM62A10X
HIGH POWER CONTACTS PLATING MATING AREA: GOLD FLASH over NICKEL PLATING TERMINATION SIDE: GOLD FLASH over NICKEL	
SIGNAL CONTACTS 30µin HARD GOLD over 50µin NICKEL	
HIGH POWER CONTACTS PLATING MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL PLATING TERMINATION SIDE: GOLD FLASH over NICKEL	3H45W2PCM42A10X

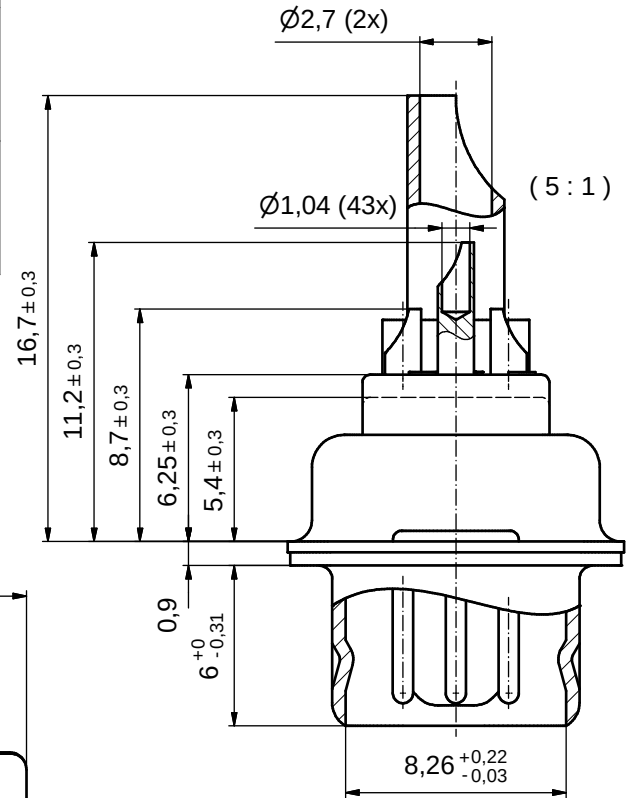

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: SEE TABLE
SOLDER CUP ACCEPTS CABLE AWG 22
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING: SEE TABLE
SOLDER CUP ACCEPTS CABLE AWG 12-14
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance	dim. in mm	
				date	name	
				drawn	25.05.10	Lehmenkühler
				appd.	25.05.10	Koch
				norm		
				d-old		
a	Origin			CONEC®		
rev.	description	date	name			

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB HD COMBINATION MALE 45W2P SOLDER CUP	
dwg no:	DIN-A3
13K1A3219	sh: 1
part no: SEE TABLE	