



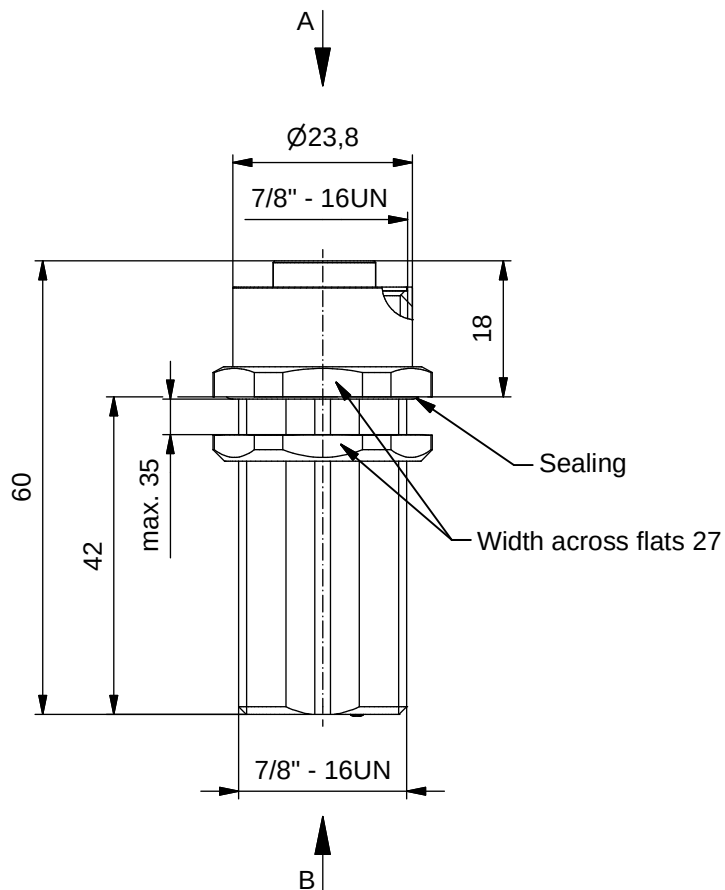


Technical specification:


Rated voltage: IEC 60664-1	300V
Overvoltage category: IEC 60664-1	2
Overvoltage: IEC 60664-1	2,7 kV
Current rating: IEC 60512-3	12 A bei 40°C
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 68, in mated condition
Temperature range:	-30°C ... +80°C
Mating cycles: IEC 60512-9a	>=100

Materials:

Contact:	CuZn, Ni b / Au 0,2 gal.
Contact carrier:	TPU, UL 94 HB
Sealing:	FPM
Socket housing:	CuZn, nickel plated
Grouting:	Polyurethane-resin, UL 94

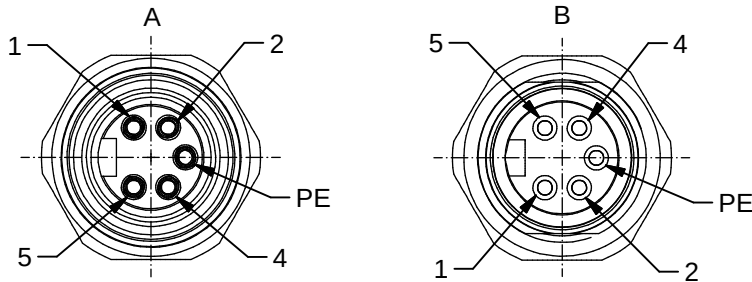

Minimum wall thickness
2,5mm, alternativ panel
cut-out d=22,4

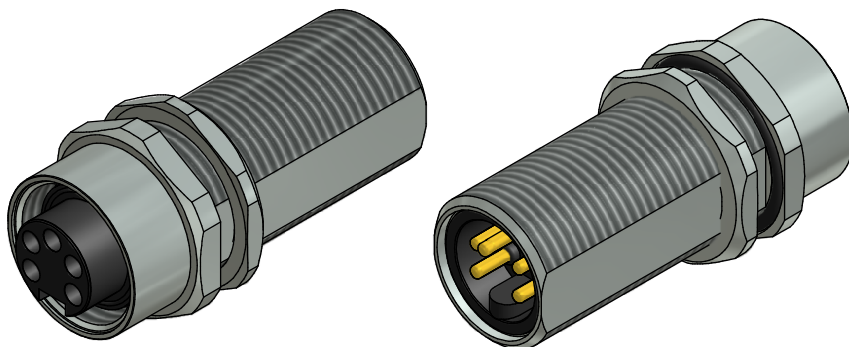


Part-no.:	Description:	Pos
41-40092	SAL - 7/8 - FK4PE - FS4PE - WD	5
41-xxxxx	SAL - 7/8 - FKx - FSx - WD	x

DO NOT ALTER CAD DRAWING BY HAND

RoHS & REACH compliant

general tolerance:	0 ± 0,50mm	
	0,0 ± 0,25mm	
	0,00 ± 0,10mm	
	± 1,5°	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH		



dim. in mm

	date	name
drawn	13.02.13	Christen
appd.	13.02.13	W.Schmidt

CONEC®

title:

Switch case lead-through 7/8",
female - male

dwg no:

41K1A491

part no: