


Recommended torque:	1-1,2 Nm
Conec installation tool:	Torque wrench: 36-000200 Insert across flats 12: 36-000470
Installation hole:	See fig.1 42K1A1119

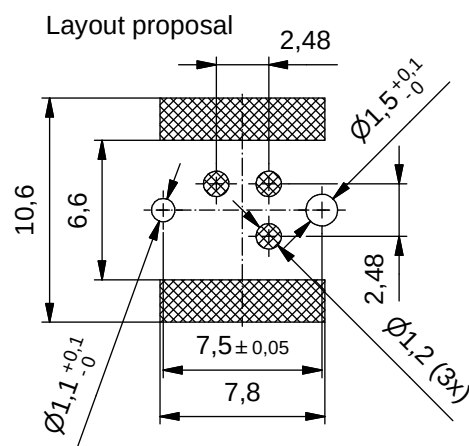

Part no. packing unit Tape & Reel:	Part no. packing unit in bulk:	Description:	Pos
42-01244TR	42-01244	SAL - 8S - FSH3 - X10 / SMT	3

DO NOT ALTER CAD DRAWING BY HAND	RoHS & REACH compliant				 dim. in mm	title: Male socket M8x1 SMT, shielded, back panel mounting, screwable / snap-in		
			date	name				
					drawn	04.05.16	Böckeler	dwg no: 42K1A770
					appd.	04.05.16	Schramm	
		general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm * ± 5°						part no: see table
		THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH						