




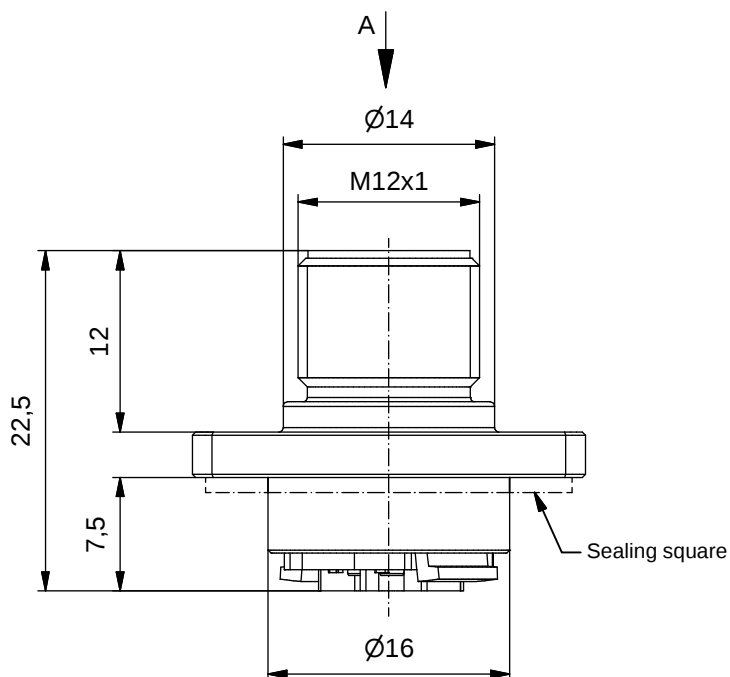


Technical specification:

Rated voltage:	30 V
IEC 61076-2-101	
Current rating:	2 A at 40°C
IEC 61076-2-101	
Insulation resistance:	>=100 MΩ
IEC 60512	
Pollution degree:	3/2
IEC 60664-1	
Degree of protection:	IP 67, in mated condition
IEC 60529	
Temperature range:	-20°C ... +85°C
Mating cycles:	>=100
IEC 60512-9a	
Wire cross section:	max. AWG22

Materials:

Contact:	CuZn, Ni3 Au 0,2 gal.
Contact carrier:	PA, UL 94 V-0
Sealing:	NBR
Socket housing:	CuZn, nickel plated

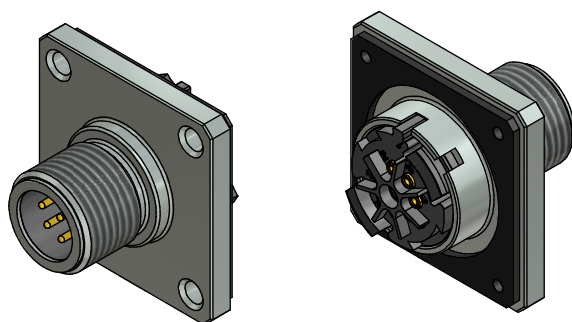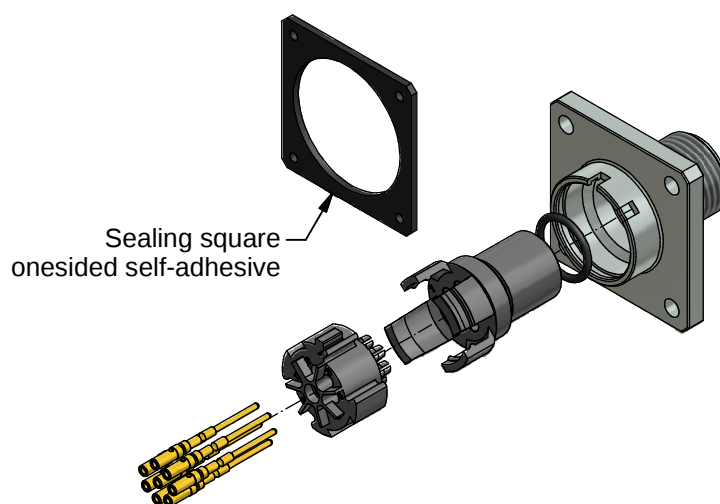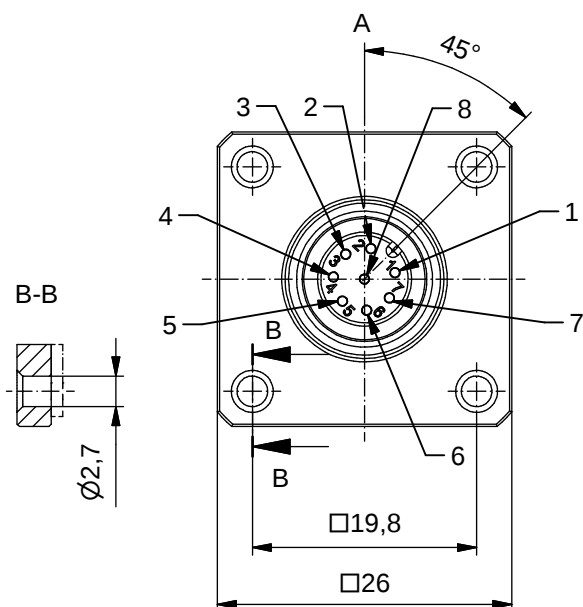


Parts loose packed

Part no:	Description:	Pos	Note:
43-02612	SAL - 12 - FSVC8 - 26	8	

DO NOT ALTER CAD DRAWING BY HAND

RoHS & REACH compliant

		dim. in mm
		date name
		drawn 03.03.15 Christen
		appd. 03.03.15 Franz
general tolerance:	0 ± 0,50mm	
	0,0 ± 0,25mm	
	0,00 ± 0,10mm	
	± ± 1,5°	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH		



title:	Male socket M12x1, field attachable, with square
dwg no:	43K1A2694
part no:	