
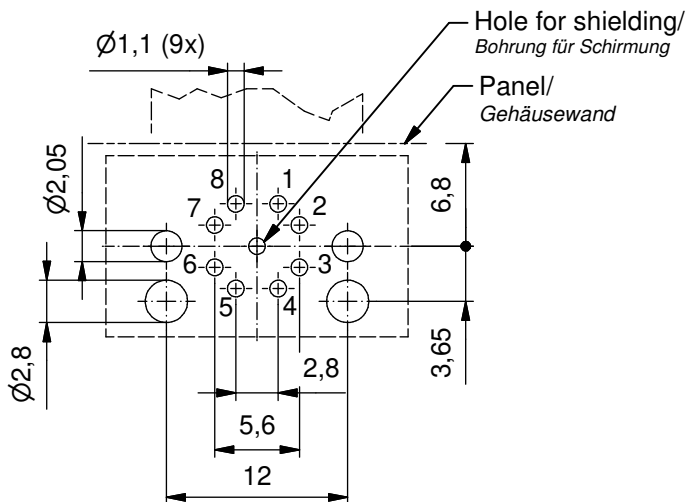
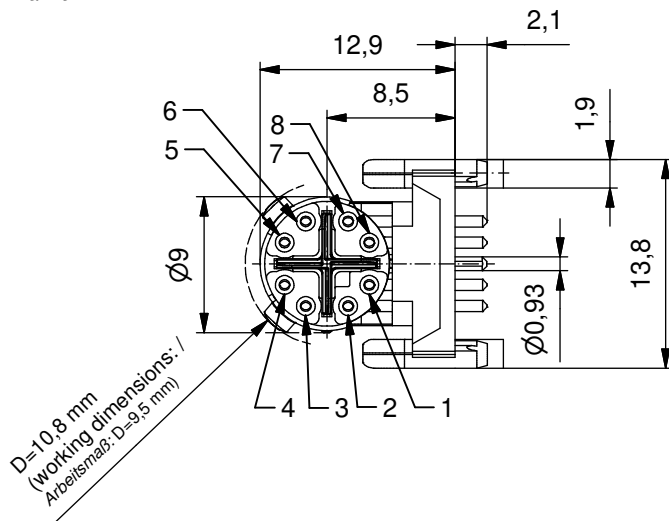


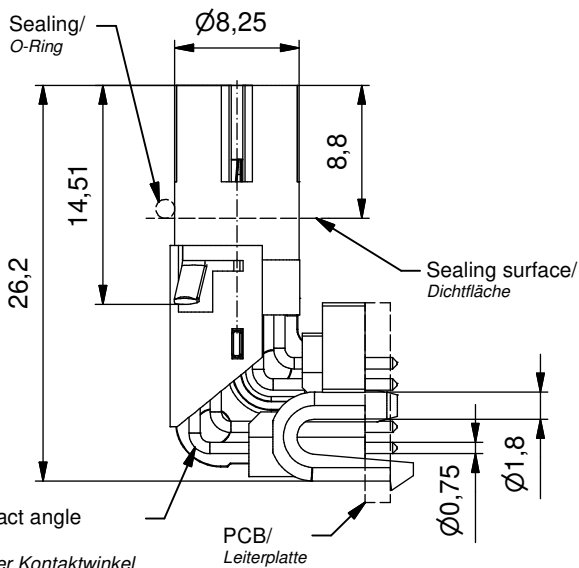

Technical specification:


Technische Daten:

Rated Voltage/ Bemessungsspannung:	48 V
IEC 61076-2-109	
Current rating/ Strombelastbarkeit:	0,5 A / 40°C
IEC 61076-2-109	
Transmission properties/ Übertragungseigen- schaften:	CAT 6A / 10 GBit/s
IEC 61076-2-109	
Insulation resistance/ Isolationswiderstand:	>=100 MΩ
IEC 60512	
Pollution degree/ Verschmutzungsgrad:	3/2
IEC 60664-1	
Degree of protection/ Schutzart:	IP 67, in mated condition/ im verschraubten Zustand
IEC 60529	
Temperature range/ Umgebungstemperatur:	-30°C ... +85°C
EN 60512-11-10	-40°C
EN 60512-11-4	-40°C ... +85°C
Mating cycles/ Steckzyklen:	>=100
IEC 60512-9a	

Materials:

Werkstoffe:

Contact/ Kontakt:	CuZn, Ni b / Au 0,2 gal.
Contact carrier/ Kontaktträger:	LCP, UL 94 V-0
Center plate/ Zentrierplatte:	PA, UL 94 V-0
Shielding cross/ Schirmkreuz:	GD-ZnAl4Cu1, Ni
Radial shielding sheet/ radiales Schirmblech:	CuSn, Ni

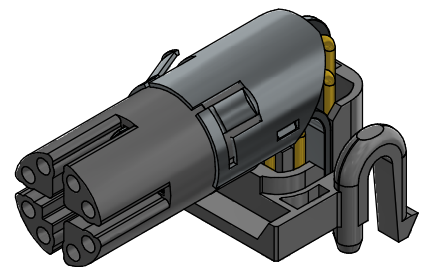


Part no./ Art.-Nr.:	Description/ Bezeichnung:	Pos/ Pol:	Note/ Bemerkung:
43 - 03484	SAL - 12X - IKW8	8	with shielding cross/ mit Schirmkreuz

**Female socket M12x1 X-Cod. angled,
backmounting, dip solder**

**Flanschkupplung M12x1 X-Cod. gewinkelt,
Hinterwandmontage, Printkontakt**

dwg no / Z.-nr.:	43K1A3854	DIN- A4
		1 / 1



dim. in mm

general tolerance/ Allgemeintoleranz:	0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm * ± 5°
--	---

drawn/ gez.	Date/Datum	Name
17.11.17	Brüntrup	
appd./ gepr.	17.11.17	Becker

Index: "d" 08.03.19 DBR Ä7825	scale/Maßstab:
Status: Freigegeben	2:1
RoHS & REACH compliant/konform	

