
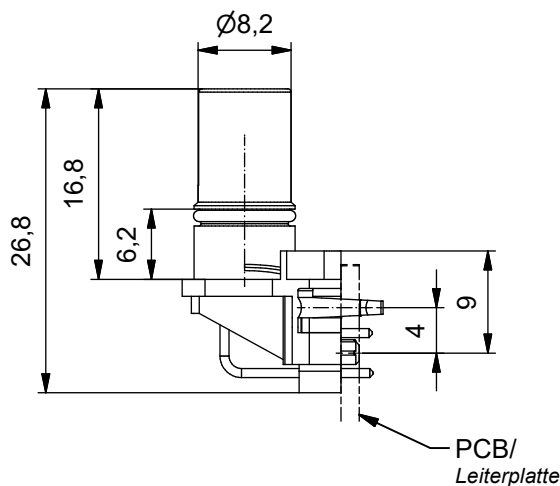
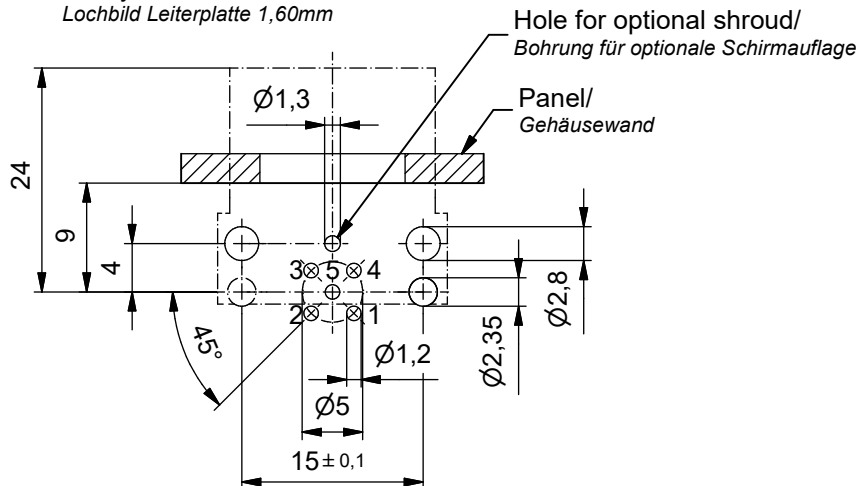


Pin layout PCB 1,60mm/
Lochbild Leiterplatte 1,60mm



Technical specification:

Technische Daten:

Rated Voltage/ Bemessungsspannung:	60V
IEC 61076-2-101	
Current rating/ Strombelastbarkeit:	4 A / 40°C
IEC 61076-2-101	
Insulation resistance/ Isolationswiderstand:	>=100 MΩ
IEC 60512	
Pollution degree/ Verschmutzungsgrad:	3/2
IEC 60664-1	
Degree of protection/ Schutzart:	IP 67, in mated condition/ im verschraubten Zustand
IEC 60529	
Temperature range/ Umgebungstemperatur:	-30°C ... +85°C
EN 60512-11-10	-40°C
EN 60512-11-4	-40°C ... +85°C
Mating cycles/ Steckzyklen:	>=100
IEC 60512-9a	


Materials/

Werkstoffe:

Contact/ Kontakt:	CuZn, Ni b / Au 0,2 gal.
Contact carrier/ Kontaktträger:	PA GF, UL 94 V-0
Sealing/ Dichtung:	NBR
Shroud/ Schirmblech:	CuSn, Ni / sel. Sn

Part no/ Art.-nr.:	Description/ Beschreibung:	Pos/ Pol:	Note/ Bemerkung:
43-03617	SAL - 12 - IKWO5	5	without shroud/ ohne Schirmblech:
43-03531	SAL - 12S - IKWO5	5	with shroud/ mit Schirmblech:

Index: b Ä22-0209 07.07.2022 LTU



dim. in mm

Insulating body female M12x1 angled,
print contact
Isolierkörper Kupplung M12x1 gewinkelt,
Printkontakt

general tolerance/ Allgemeintoleranz:	0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm * ± 1,5°
--	---

	Date/Datum	Name
drawn/ gez.	07.03.2018	Fromm
appd./ gepr.	07.03.2018	Schramm

Index: a Original	scale/Maßstab:
RoHS & REACH compliant/konform	

CONEC®

dwg no /
Z.-nr.: 43K1A3954

DIN-
A4

1 / 2