

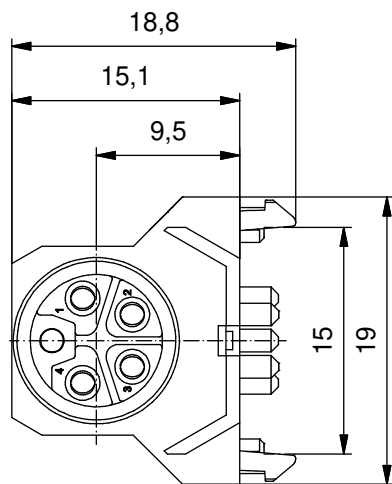


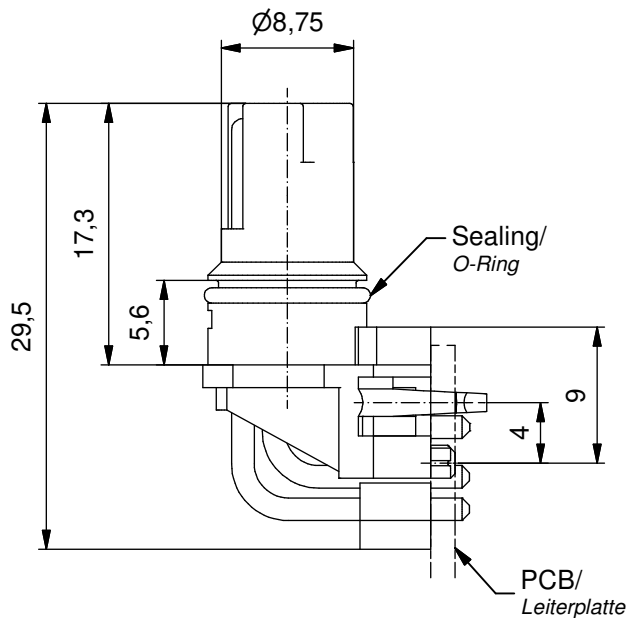

Pin layout PCB 1,60mm/
Lochbild Leiterplatte 1,60mm

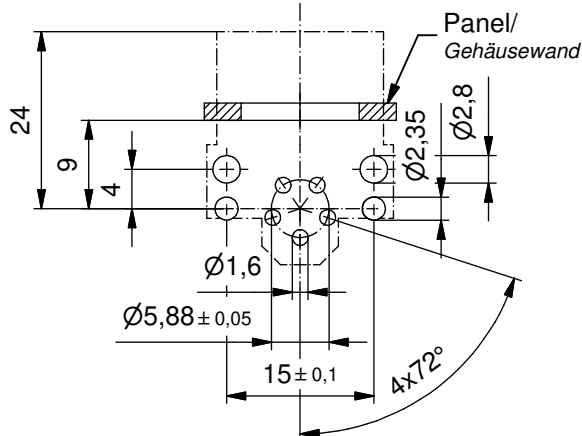

Technical specification:


Technische Daten:

Rated Voltage/ Bemessungsspannung:	60 V
IEC 61076-2-111	
Current rating/ Strombelastbarkeit:	16 A / 40 °C
IEC 61076-2-111	
Insulation resistance/ Isolationswiderstand:	>=100 MΩ
IEC 60512	
Pollution degree/ Verschmutzungsgrad:	3/2
IEC 60664-1	
Degree of protection/ Schutzart:	IP 67, in mated condition/ im verschraubten Zustand
IEC 60529	
Temperature range/ Umgebungstemperatur:	-30 °C ... +85 °C
EN 60512-11-10	-40 °C
EN 60512-11-4	-40 °C ... +85 °C
Mating cycles/ Steckzyklen:	>=100
IEC 60512-9a	

Materials/

Werkstoffe:

Contact/ Kontakt:	Copperalloy Kupferlegierung, Ni b / Au 0,2 gal.
Contact carrier/ Kontaktträger:	PA GF, UL 94 V-0
Sealing/ Dichtung:	FKM

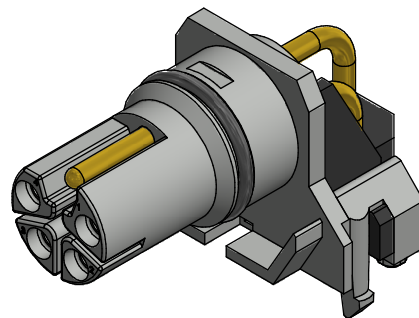

Part no/ Art.-nr.:	Description/ Beschreibung:	Pos/ Pol:	Note/ Bemerkung:
43-03559	SAL - 12L - IKW4FE	5	

general tolerance/
Allgemeintoleranz:


0	± 0,50mm
0,0	± 0,25mm
0,00	± 0,10mm
*	± 1,5°

Index: a Original

Status: Freigegeben

RoHS & REACH compliant/konform

scale/Maßstab:



dim. in mm

	Date/Datum	Name
drawn/ gez.	23.01.18	Fromm
appd./ gepr.	23.01.18	Schramm

CONEC®

Insulating body female M12x1 angled,
L-coding, print contact

Isolierkörper Kupplung M12x1 gewinkelt,
L-codiert, Printkontakt

dwg no /
Z.-nr.:

43K1A4006

DIN-
A4

1 / 2