

Technical specification:

Rated voltage: 4pol 5pol
IEC 61076-2-101 240 V 60 V

Current rating: 4 A at 40°C
IEC 61076-2-101

Insulation resistance: $\geq 100 \text{ M}\Omega$
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C

Mating cycles: ≥ 100
IEC 60512-9a

Materials:

Contact: CuZn

Contact plating: Nickel, gold plated

Contact carrier: PA, UL 94

Sealing: FPM

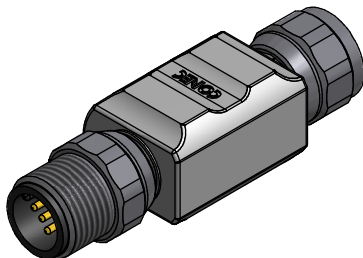
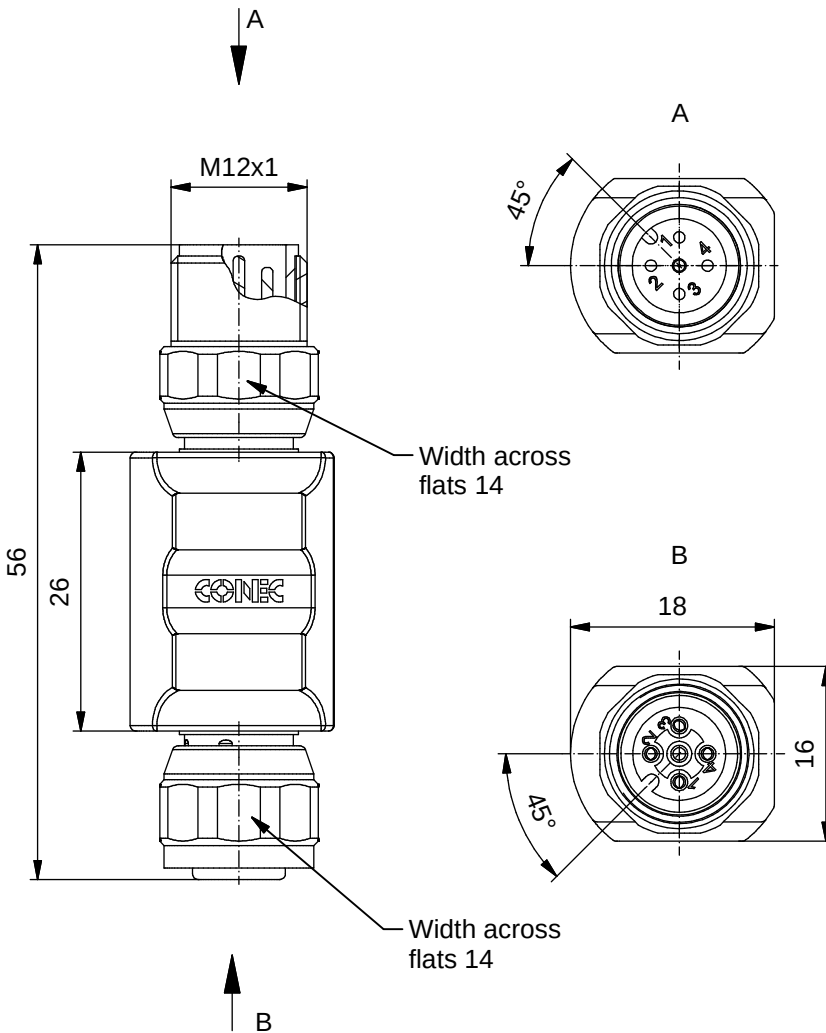

Coupling nut/
screw: 1.4404 stainless steel

Moulding body: TPU, UL 94, grey


Installation specification:

Recommended
torque: 0,6 Nm

Conec
installation tool: Torque wrench:
36-000200
Insert across flats 14:
36-000370

Contact assignment:

Part no:	Description:
43-05150	SAL-12-TSE4-TKE4
43-05151	SAL-12-TSE5-TKE5

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant	 dim. in mm		title: Adapter, male connector M12x1 - female connector M12x1 stainless steel
	drawn	23.10.12 Gitinow	
	appd.	23.10.12 Fromm	dwg no: 43K1A1784
	general tolerance: 0 $\pm 0,50\text{mm}$ 0,0 $\pm 0,25\text{mm}$ 0,00 $\pm 0,10\text{mm}$		part no: see table

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND
MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

CONEC®