


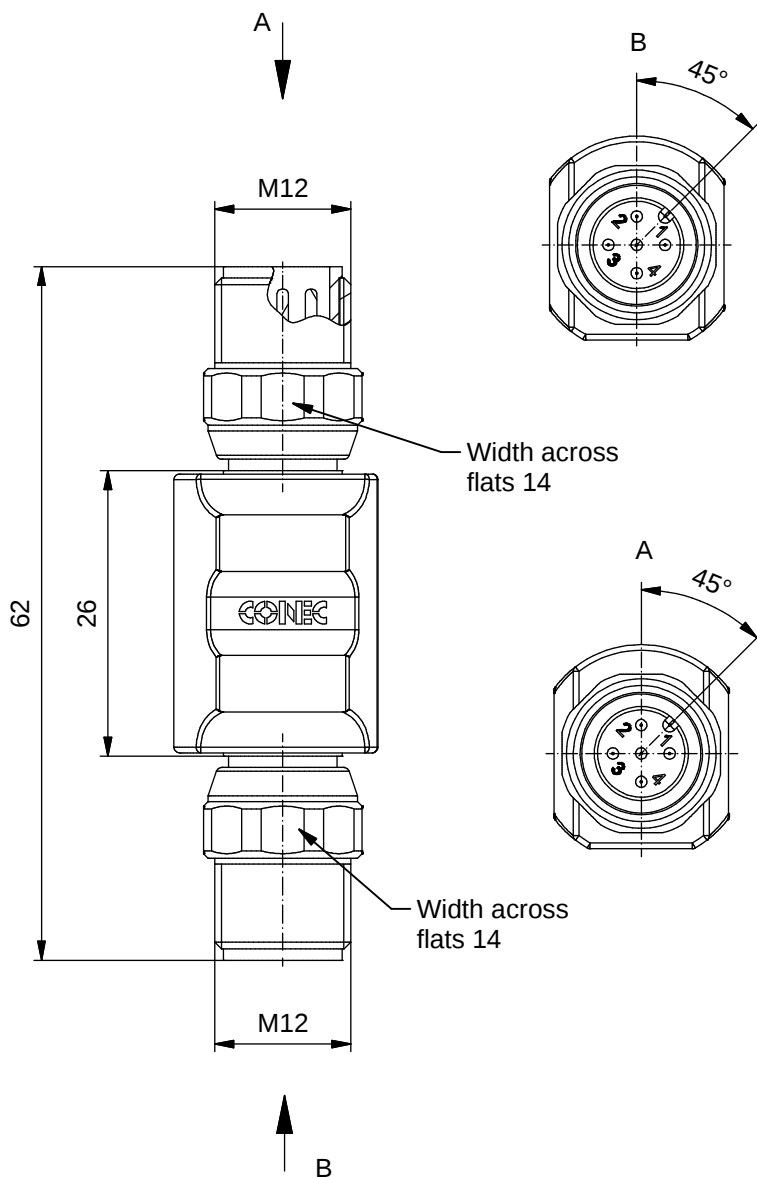

Technical specification:

Rated voltage: IEC 61076-2-101	4pol 240V	5pol 60 V
Current rating: IEC 61076-2-101	4A at 40°C	
Insulation resistance: IEC 60512-2	>=10 GΩ	
Pollution degree: IEC 60664-1	3/2	
Degree of protection: IEC 60529	IP 67, in mated condition	
Temperatur range:	-30°C ... +80°C	
Mating cycles: IEC 60512-9a	>=100	

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	PA, UL 94
Coupling screw:	1.4404 Edelstahl
Moulding body:	TPU, UL 94, grey


Installation specification:

Recommended torque:	0,6 Nm
Conec installation tool:	Torque wrench: 36-000200 Insert across flats 14: 36-000370

Contact assignment:

1	—	1
2	—	2
3	—	3
4	—	4
5	—	5

Part no:	Description:
43-05152	SAL-12-TSE5.1-TSE5.1

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant					dim. in mm	title: Adapter, male connector M12x1 - male connector M12x1 stainless steel
		date	name			
		drawn	23.10.12	Gitinow		dwg no: 43K1A1785
		appd.	23.10.12	Fromm		
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm					part no: see table
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH						

CONEC®

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH