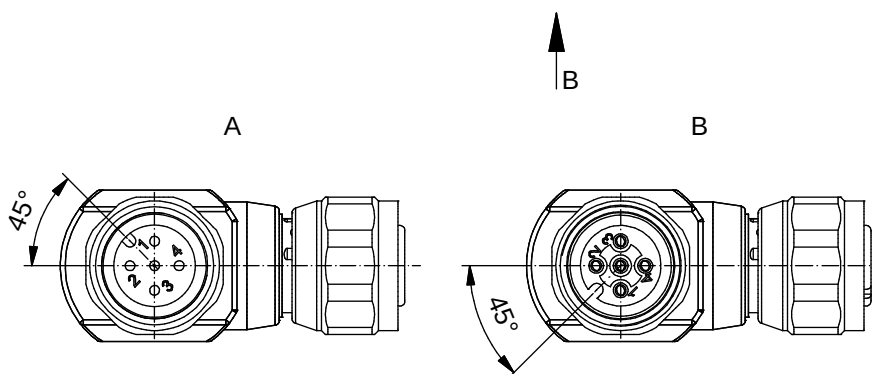
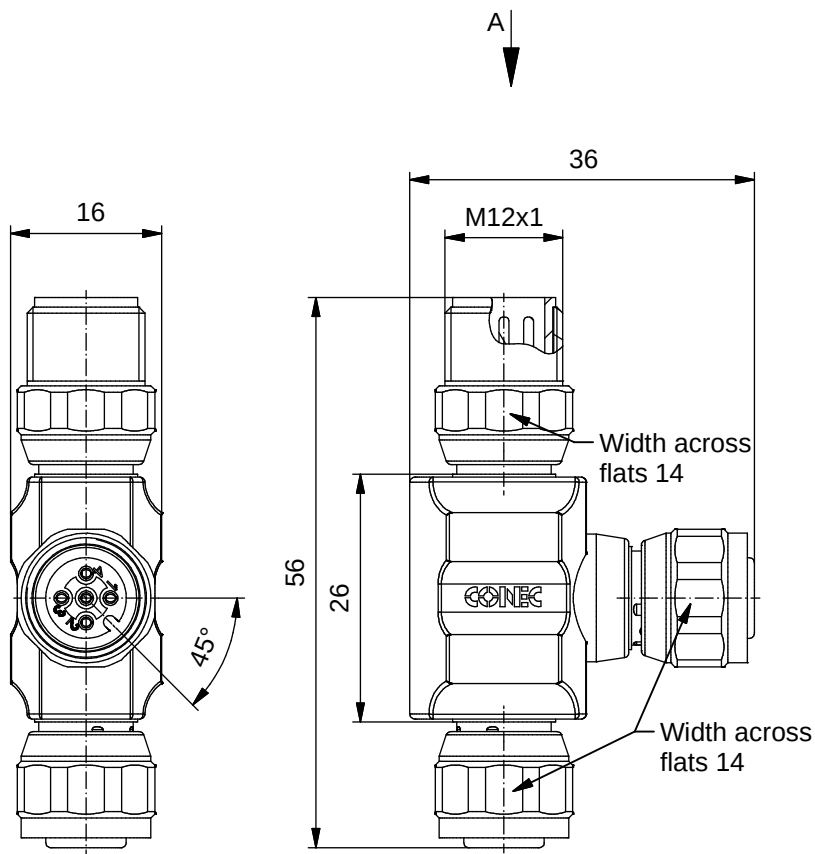



Technical specification:

Rated voltage: IEC 61076-2-101	5pol 60 V
Current rating: IEC 61076-2-101	4 A at 40°C
Insulation resistance: IEC 60512	$\geq 100 \text{ M}\Omega$
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range:	-30°C ... +80°C
Mating cycles: IEC 60512-9a	≥ 100
Materials:	
Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	PA, UL 94
Sealing:	FPM
Coupling nut/ screw:	1.4404 stainless steel
Moulding body:	TPU, UL 94, grey

Installation specification:

Recommended torque:	0,6 Nm
Conec installation tool:	Torque wrench: 36-000200 Insert across flats 14: 36-000370

Contact assignment:




Part no:	Description:
43-05154	SAL-12-TSE5.1-TKE5.1-TKE5.1

DO NOT ALTER CAD DRAWING BY HAND

Directive 2002/95/EC RoHS compliant

	dim. in mm
date	name
drawn	23.10.12 Gitinow
appd.	23.10.12 Fromm
general tolerance:	0 $\pm 0,50\text{mm}$ 0,0 $\pm 0,25\text{mm}$ 0,00 $\pm 0,10\text{mm}$
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	



title:	Adapter, male connector M12x1 - 2x female connector M12x1 stainless steel
dwg no:	43K1A1787
part no:	see table