

Actuator

46-
2234.11J0.000



<https://testing.eao.com/p/46-2234.11J0.000>

Your product:



46-2234.11J0.000 Actuator

FRONT

Front bezel material:	Plastic
Front dimension:	Ø 29 mm
Front form:	round
Front bezel colour:	Black

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm

OPERATING-/INDICATION PART

Lens shape:	flush
Lens illumination:	illuminative
Lens optics:	transparent
Lens material:	Plastic
Lens colour:	Blue

ELECTRICAL CHARACTERISTICS

Protection class:	II
-------------------	----

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Weight:	0.019 kg

Mechanical lifetime:	500 000 cycles of operation
Tightening torque:	2 ... 3 Nm (17.7 ... 26.6 Lb-in)

AMBIENT CONDITION


Shock resistance:	30g, 18ms (EN-IEC 60068-2-27) 50g, 11ms (EN-IEC 60068-2-27)
Operating temperature:	– 25 °C ... + 55 °C
Vibration resistance:	5g f= 2...500Hz (EN-IEC 60068-2-6)
IP front protection:	IP65
Climate resistance:	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
IK front protection:	IK03

CERTIFICATE

Standards:	CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508
Conformities:	CE
Approbations:	CSA, EAC, UL

OTHER

Housing colour:	Black
max. number of switching elements:	4
Short Description:	Actuator, Ø 22.3 mm, Ø 29 mm, flush, illuminative, Blue, Plastic, transparent, round, Black, Plastic, Maintained, IP65, IK03
Housing material:	Plastic
Dimension drawings:	

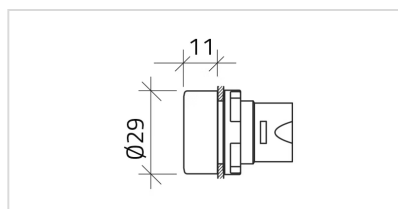

Mounting cut-outs:

