

Actuator

46-
2828.1CV0.001



<https://testing.eao.com/p/46-2828.1CV0.001>

Your product:



46-2828.1CV0.001 Actuator

FRONT

Front bezel colour:	Black
Front bezel material:	Plastic
Front dimension:	Ø 29 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm

OPERATING-/INDICATION PART

Lever shape:	short
Lever material:	plastic
Lever colour:	Black
Lever bar colour:	White

ELECTRICAL CHARACTERISTICS

Protection class:	II
-------------------	----

MECHANICAL CHARACTERISTIC

Switching positions:	2 positions
Switching action:	Maintained - Maintained
Tightening torque:	2 ... 3 Nm (17.7 ... 26.6 Lb-in)

Weight: 0.027 kg

Mechanical lifetime: 1 Mio. cycles of operation

Switching angle: 90°

AMBIENT CONDITION

Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

IP front protection: IP65

Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)

IK front protection: IK06

Operating temperature: – 25 °C ... + 55 °C

Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)

CERTIFICATE

Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

Approbations: CSA, EAC, UL

Conformities: CE

OTHER


Housing material: Plastic

Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, non illuminative, Black, short, round, Black, Plastic, Maintained - Maintained, IP65, IK06


Housing colour: Black

max. number of switching elements: 8

Dimension drawings:

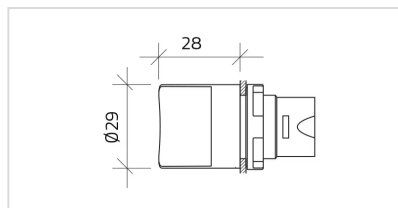

Mounting cut-outs:

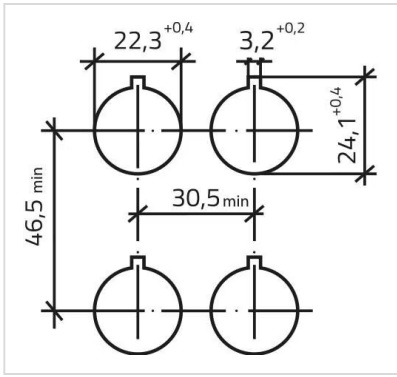

Switching positions:

