
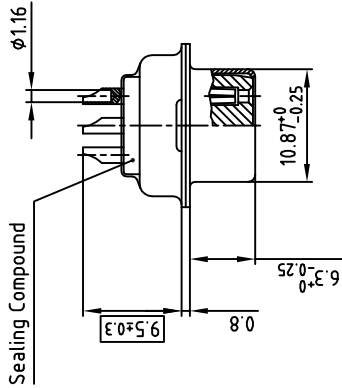


used for: D-SUB

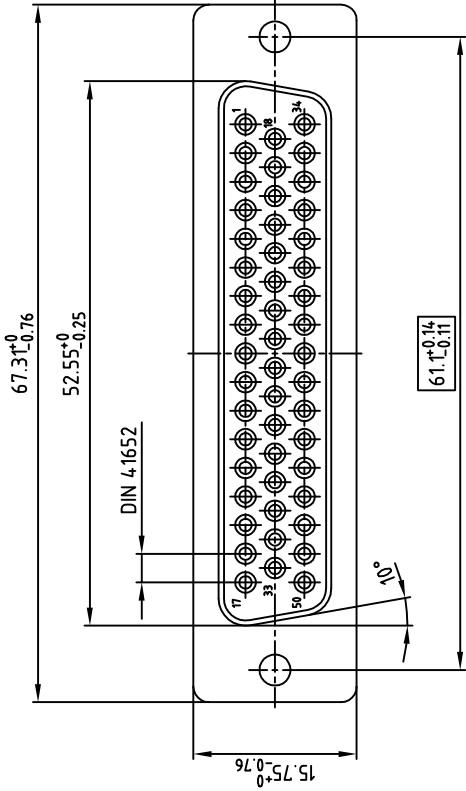

- NOTES:
1. METAL SHELLS: STEEL, TIN PLATED
 2. INSULATORS: PBT GF UL 94 V-0; BLACK
 3. CONTACTS: COPPER ALLOY
 4. PLATING: HARD GOLD OVER NICKEL
 5. = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

tolerance		scale:		material:		2:1		SEE NOTES	
1999	date	name	date	name	date	name	date	name	date
drawn	02.11.	Barcinski	drawn	02.11.	Barcinski	drawn	02.11.	Barcinski	drawn
appd.	02.11.	Mickenbecker	appd.	02.11.	Mickenbecker	appd.	02.11.	Mickenbecker	appd.
norm		DIN 41652	norm		DIN 41652	norm		DIN 41652	norm
d-old			d-old			d-old			d-old

D-SUB FEMALE
SOLDER CUP 50pos.
for watertight hood

18K1IE9A

dwg no:



product no:

4STD50SAM99A10X

Directive 2002/95/EC RoHS compliant