


article#	6139-4
article description	CEE-inlet flange 70x70 straight 20A 2P3W 4h IP44 UL
description long	CEE-inlet flange 70x70 straight 20A 2P3W 4h IP44 UL (PCE320B4S) housing material: PA6 rated current: 16A/20A number of poles: 2P3W (3p) clock position: 4h rated voltage: 120Vac contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 70x70mm / 56x56mm IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399429729
country of origin	AT
customs number	85366990
net weight	0.086 kg
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001319
IEC-amperage	16 A
Amperage according to UL/CSA (for UL-version)	20 A
Number of poles	3
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Built-up device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

a	2.76 inch
b	2.76 inch
c	2.20 inch
d	2.20 inch
e	0.83 inch
f	1.65 inch
g	0.22 inch
h	1.69 inch
wire flexible	16-12 AWG
wire solid	1-4 mm ²
contact screws	8.85 lbf-in
dismantling length	1.97 inch
stripping length	0.39-0.47 inch
ambient temperature	—
temperature resistance	-13 – 176 °F

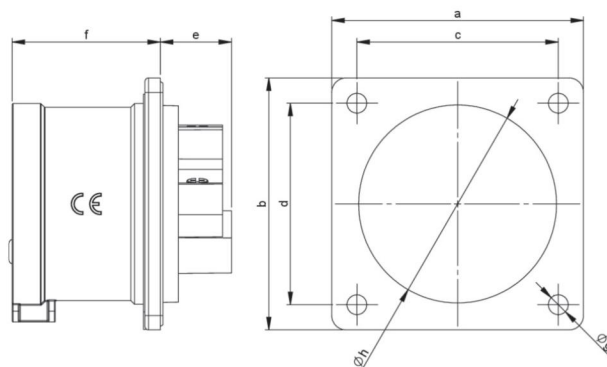

<https://www.pcelectric.at/shop/en/?func=detail&artnr=6139-4>