



Image may differ from product. See technical specification for details.

## 7006 CDGA/P4A

### Super-precision, high-capacity, universally matchable single row angular contact ball bearing

These super-precision, high-capacity, single row angular contact ball bearings accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They are designed to accommodate heavy loads at relatively high speeds under low to moderate operating temperatures. Being universally matchable, they can be used together in arrangements to provide effective load sharing, within a predetermined preload range, without the use of shims or similar devices.

- Very high running accuracy
- Very high load carrying capacity
- Relatively high speed and stiffness
- Universally matchable



Thanks for your interest in SKF super-precision bearings! We are constantly seeking to improve how we serve our site visitors with the best content and would be grateful if you can spare a moment to answer 3 short questions. Thank You!

Next

# Overview

## Dimensions

Bore diameter	30 mm
Outside diameter	55 mm
Width	13 mm
Contact angle	15 °

## Properties

Contact type	Normal contact (two-point contact)
Number of rows	1
Ring type	One-piece inner and outer rings
Design	High-capacity D
Universal matching bearing	Yes, back-to-back (<>), face-to-face (><) or tandem (>>)
Matched arrangement	No
Matched condition (axial clearance/ preload)	Measuring load, class A
Tolerance class	P4A
Material, bearing	Bearing steel
Coating	Without
Sealing	Without
Lubricant	None

## Performance

Basic dynamic load rating	14.3 kN
Basic static load rating	8 kN
Note	Contact SKF for the attainable speeds

## Logistics


Product net weight	0.11 kg
eClass code	23-05-08-04
UNSPSC code	31171531

Thanks for your interest in SKF super-precision bearings! We are constantly seeking to improve how we serve our site visitors with the best content and would be grateful if you can spare a moment to answer 3 short questions. Thank You!

# Technical specification


Universal matching bearing(s)

Yes, back-to-back (<>), face-to-face (><) or tandem (>>)

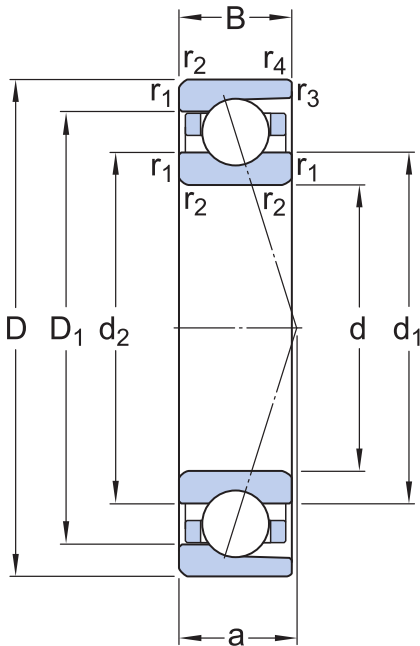


## Dimensions

d	30 mm	Bore diameter
D	55 mm	Outside diameter
B	13 mm	Width
d <sub>1</sub>	37.7 mm	Shoulder diameter of inner ring (large side face)
d <sub>2</sub>	37.7 mm	Shoulder diameter of inner ring (small side face)
D <sub>1</sub>	47.3 mm	Shoulder diameter of outer ring (large side face)
r <sub>1,2</sub>	min. 1 mm	Chamfer dimension
r <sub>3,4</sub>	min. 0.3 mm	Chamfer dimension
a	12.3 mm	Distance from side face to pressure point

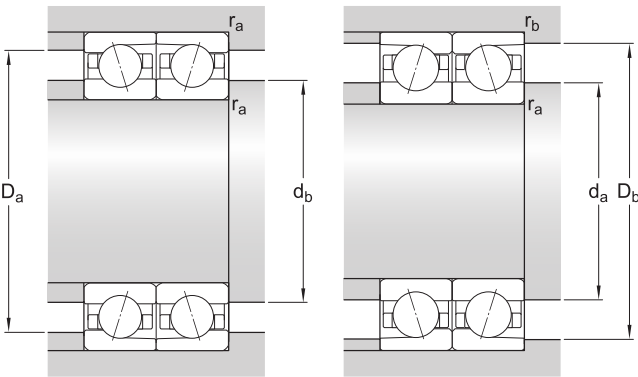

## Abutment dimensions

d <sub>a</sub>	min. 34.6 mm	Diameter of shaft abutment
d <sub>b</sub>	min. 34.6 mm	Diameter of shaft abutment
D <sub>a</sub>	max. 50.4 mm	Diameter of housing abutment
D <sub>b</sub>	max. 53 mm	Diameter of housing abutment
r <sub>a</sub>	max. 1 mm	Radius of fillet

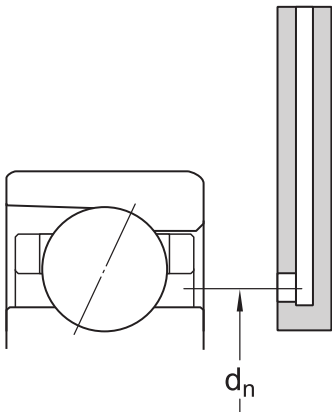

Thanks for your interest in SKF super-precision bearings! We are constantly seeking to improve how we serve our site visitors with the best content and would be grateful if you can spare a moment to answer 3 short questions. Thank You!

Basic dynamic load rating	C	14.3 kN
Basic static load rating	C <sub>0</sub>	8 kN
Fatigue load limit	P <sub>u</sub>	0.34 kN
Attainable speeds		Contact SKF for the attainable speeds
Contact angle	α	15 °
Ball diameter	D <sub>w</sub>	7.938 mm
Number of rows	i	1
Number of balls (per bearing)	z	14
Reference grease quantity (per bearing)	G <sub>ref</sub>	1.59 cm <sup>3</sup>

### PRELOAD AND STIFFNESS (BACK-TO-BACK, FACE-TO-FACE)

Preload class		A
Preload when unmounted	G	50 N
Axial stiffness		30 N/μm

### CORRECTION FACTORS FOR PRELOAD CALCULATION

Correction factor dependent on bearing series and size	f	1.06
Correction factor dependent on contact angle	f <sub>1</sub>	1
Correction factor, preload class A	f <sub>2A</sub>	1
Correction factor for hybrid bearings	f <sub>HC</sub>	1

### FACTORS FOR EQUIVALENT BEARING LOAD CALCULATION

Calculation factor for equivalent loads	f <sub>0</sub>	9.4
Additional factors for equivalent loads		Refer to Notes

#### Mass

Mass	0.11 kg
------	---------

Thanks for your interest in SKF super-precision bearings! We are constantly seeking to improve how we serve our site visitors with the best content and would be grateful if you can spare a moment to answer 3 short questions. Thank You!