

Data sheet | Item number: 734-230

Operating tool; made of insulating material; 1-way; white

www.wago.com/734-230



Data

Technical data

Main product function	Operating tool
Number of pitches	1 -way

Physical data

Depth	18.9 mm / 0.75 inch
Pin spacing	3.5/3.81 mm

Material data

Color	white
Fire load	0.006 MJ
Weight	0.2 g

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Commercial data

Product Group	3 (Multi Conn. System)
Packaging type	box
Country of origin	DE
GTIN	4017332703253
Customs tariff number	82055980000

Approvals / Certificates

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

CAD/CAE-Data

CAD data

2D/3D Models 734-230	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 734-230	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 734-230	URL	Download
Operating tool; made of insulating material; 1-way; white		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

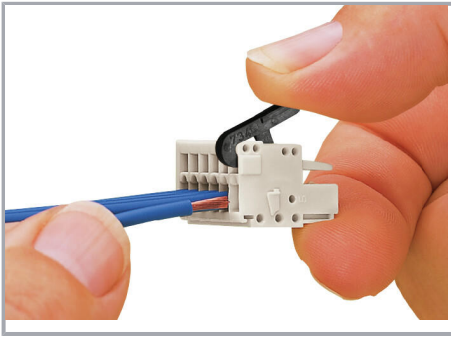

Inserting a conductor via operating lever.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.