

Illuminated pushbutton Ø 16 mm silver contact

82-4152.1124



<https://eao.com/p/82-4152.1124>

Your product:



82-4152.1124

Illuminated pushbutton Ø
16 mm silver contact

FRONT

Front bezel material: Stainless steel

MOUNTING

Mounting cut-out: Ø 16 mm

OPERATING-/INDICATION PART

Lens material: Stainless steel

Lens optics: opaque

Lens illumination: illuminative

Lens colour: Silver

Illumination colour: Blue

Shape of illumination: Ring

Lens shape: flush

ELECTRICAL CHARACTERISTICS

Rated Operational Voltage U_e: 250 VAC

Operating voltage: 24 V AC/DC

Contacts: 1 C

Thermal current I_{th}: 5 A

Rated insulation voltage U_i: 250 V

Electric strength: 1500 VAC, 50 Hz 1 minute between life terminals and ground

Switching voltage and switching current:

according to IEC 60947-5-1 (Silver contacts)	
Service categorie AC-15	
Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)	
cosφ 0,75 ... 0,8	
Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

Electrical lifetime:	50 000 cycles of operation
Pollution degree:	2, according to EN IEC 60947-1

MECHANICAL CHARATERISTIC

Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Weight:	0.018 kg
Operating force:	4 N ... 7 N
Operating Travel:	ca. 3 mm
Mechanical lifetime:	1 Mio. cycles of operation
Terminal:	Screw terminal
Switching system:	Snap-action switching element
Switching action:	Momentary
Contact material:	Silver

AMBIENT CONDITION

Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Climate resistance:	Damp heat, 21 days according to IEC 60512-11
Operating temperature:	– 30 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27

CERTIFICATE

Conformities:

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:

CB, CCC, C UL, UL

OTHER


Short Description:

Illuminated pushbutton Ø 16 mm silver contact, Momentary, 24 V AC/DC, 1 C,
Screw terminal, Stainless steel, Blue, Silver


Kind of illumination:

Single-LED


Component layouts:

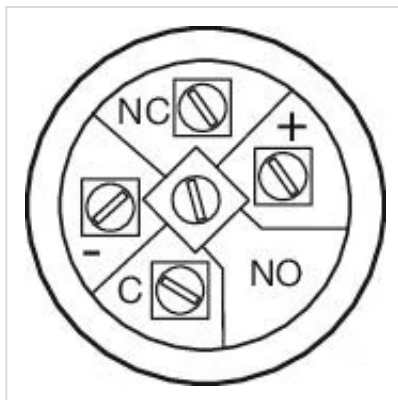

Wiring diagrams:

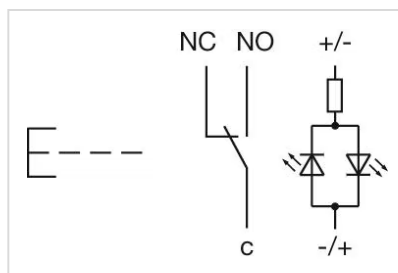

Mounting cut-outs:

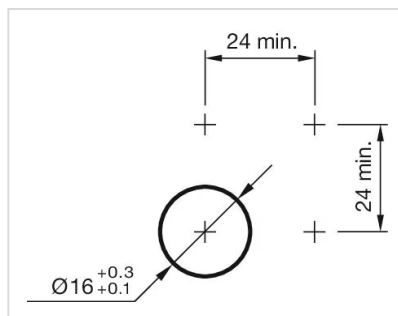

Dimension drawings:

